


ROGUE®

BOLT TOGETHER UTILITY BENCH

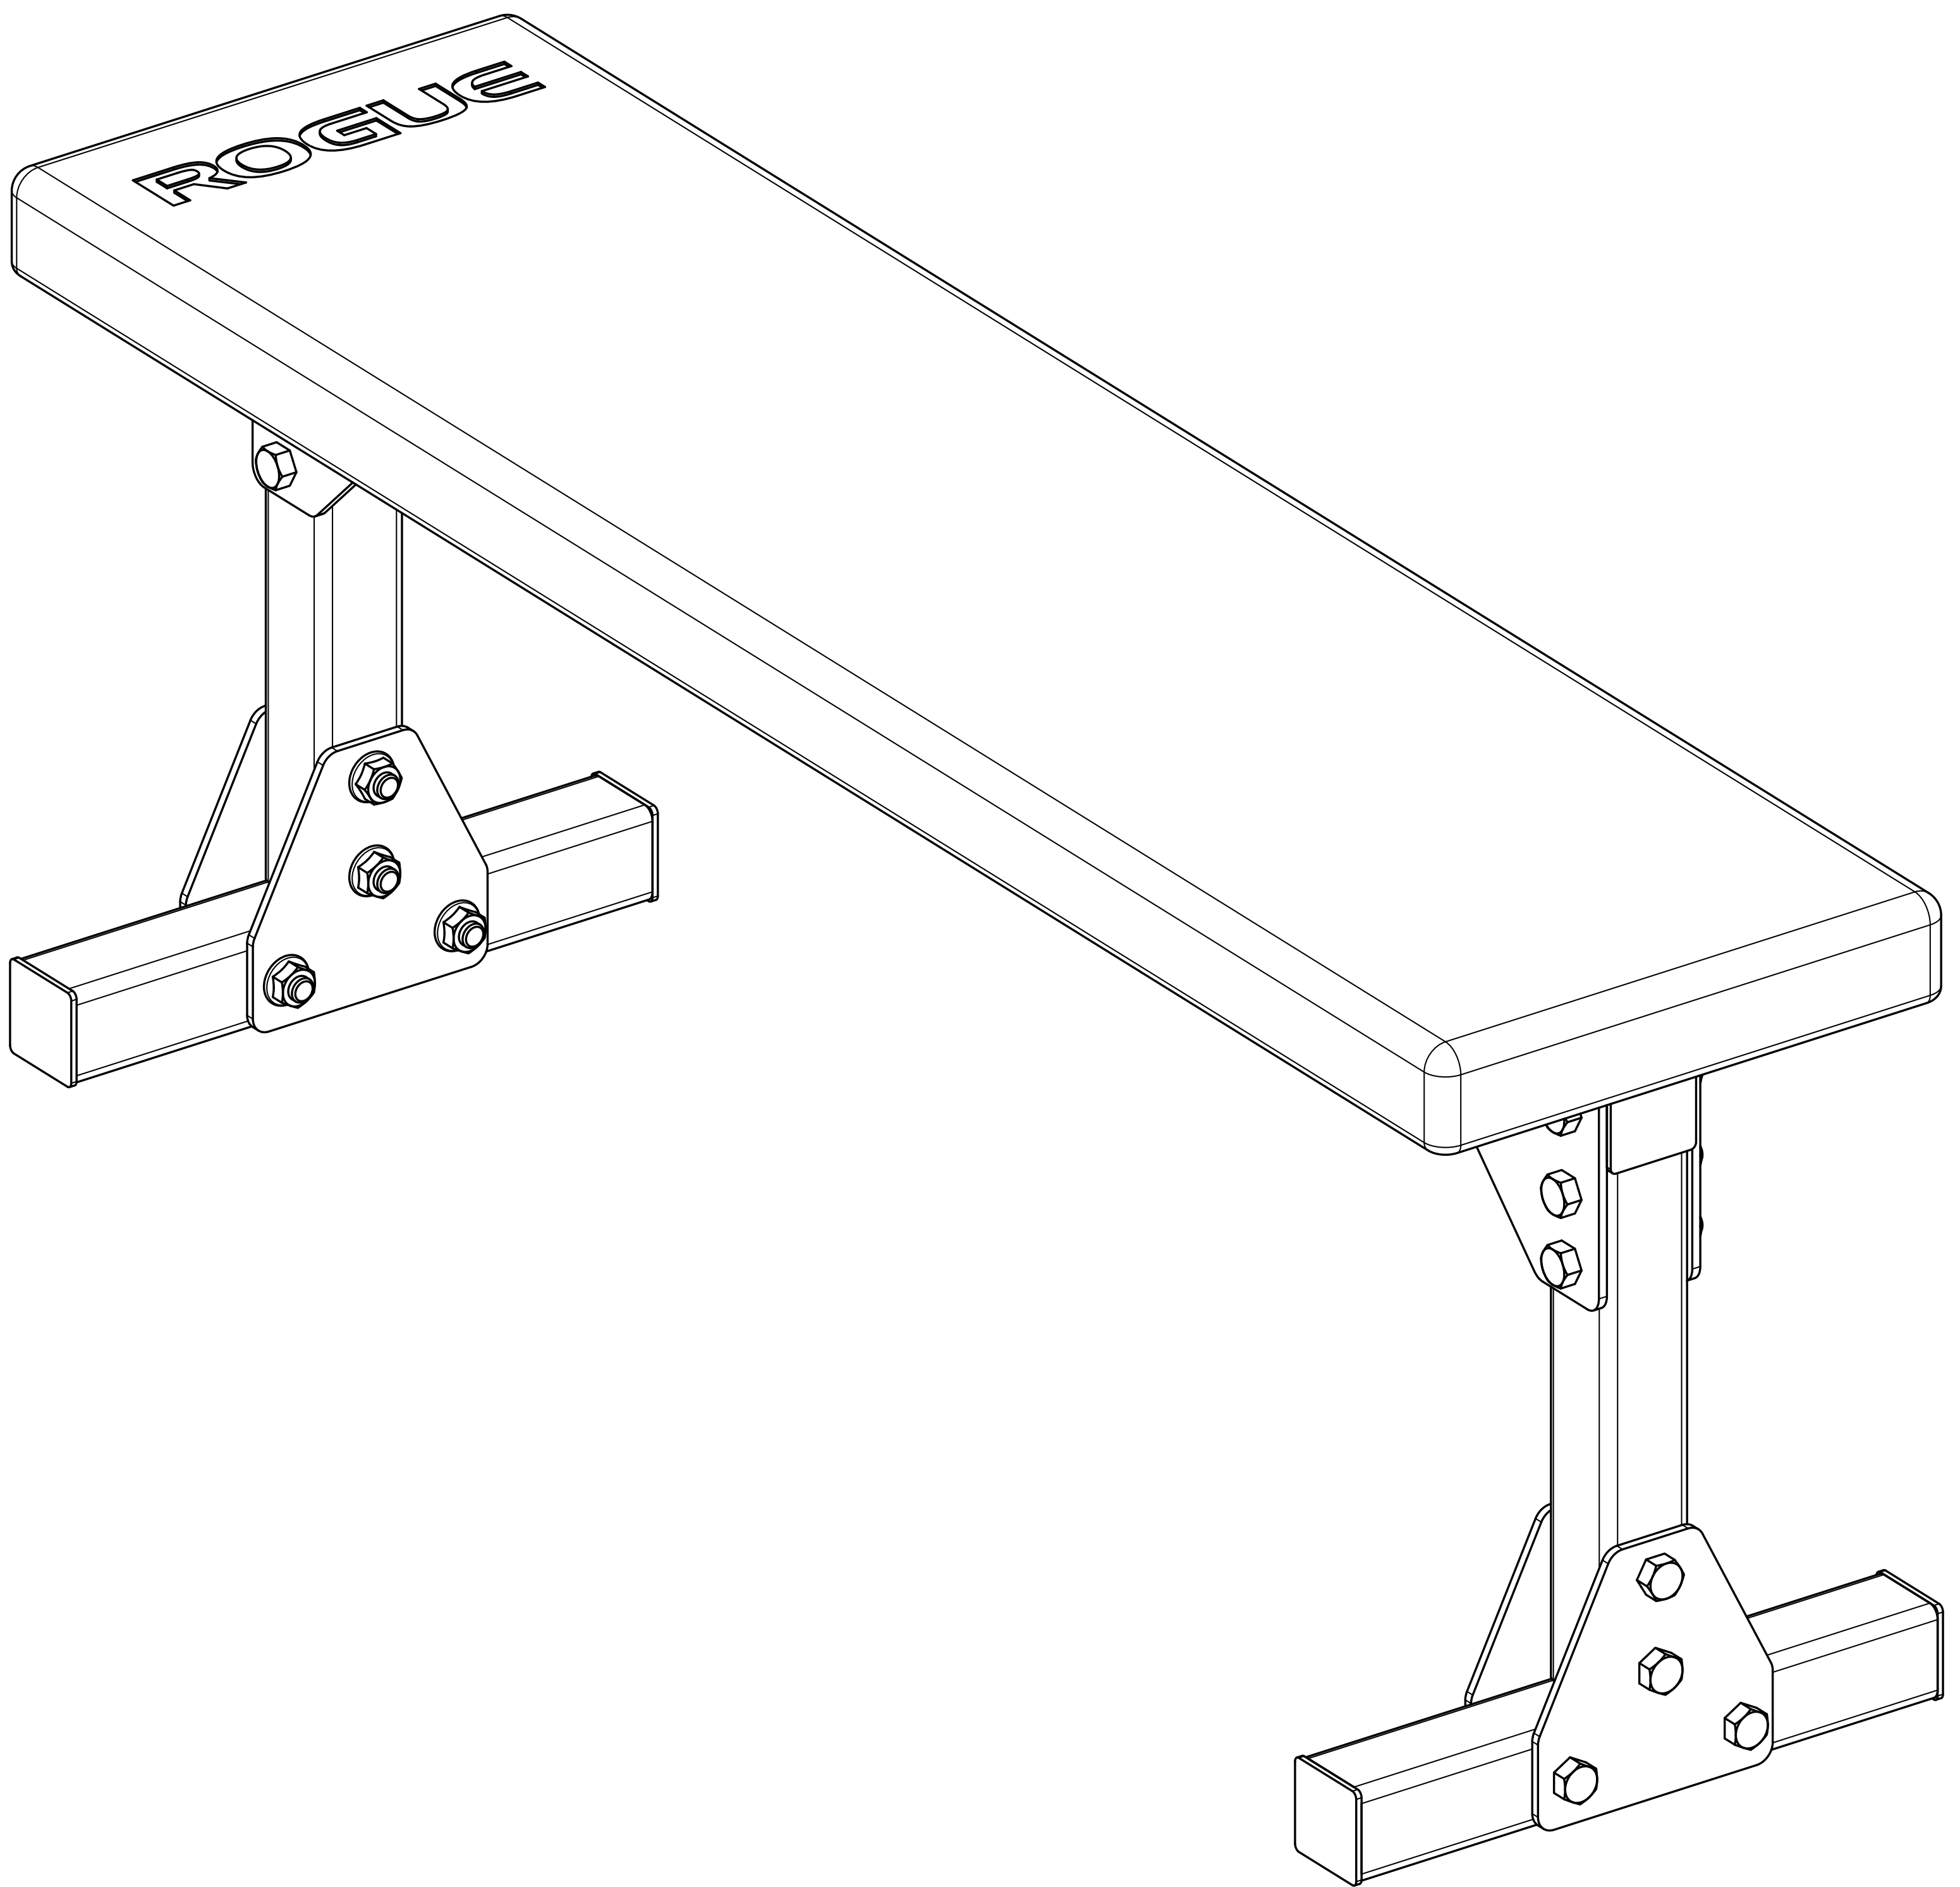

⚠ IMPORTANT SAFETY INFORMATION

DISCLAIMER:

Resistance training, gymnastics training, and activities at height are potentially dangerous and may lead to severe injury or even death. Use common sense when training, obtain instruction in the proper execution of movements, and understand your limitations. This equipment must only be used by competent and responsible persons. Obtaining instruction in appropriate techniques and methods of use is your own responsibility. You assume all risks and responsibilities for all damage, injury or death which may occur during or following incorrect use of this equipment in any matter whatsoever. Rogue Fitness bears no liability beyond the replacement value of the equipment in question.

WARNING:


MISUSE OF THIS PRODUCT CAN RESULT IN SEVERE INJURY. Both Rogue Fitness and buyer disclaim any express or implied warranty, including, without limitation, warranties or merchantability and/or fitness for a particular purpose with respect to the equipment. Buyer assumes all liability to use of equipment.

INCLUDED PARTS: Slice Sled

Note: Images not shown at scale

1


Qty: 2x

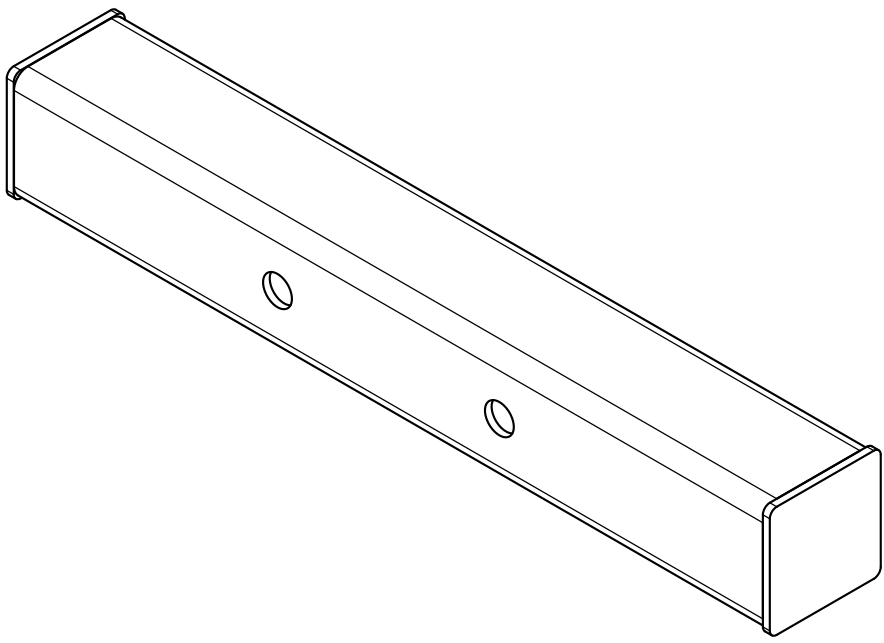

Bench Foot

2


Qty: 4x

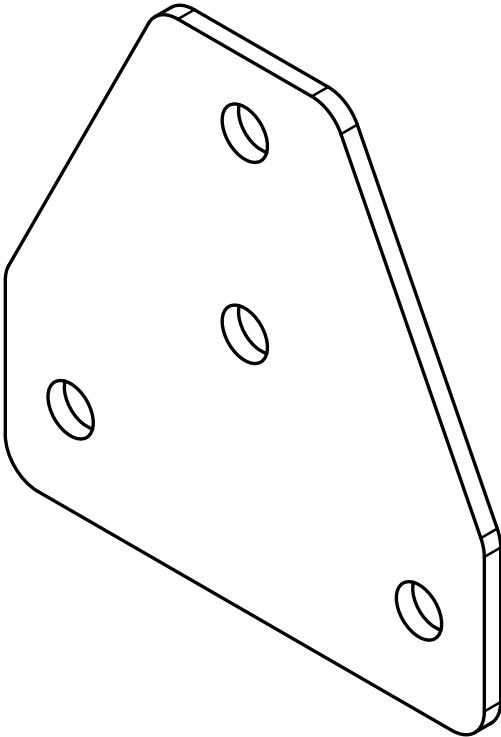

Bench Foot Plate

3


Qty: 16x

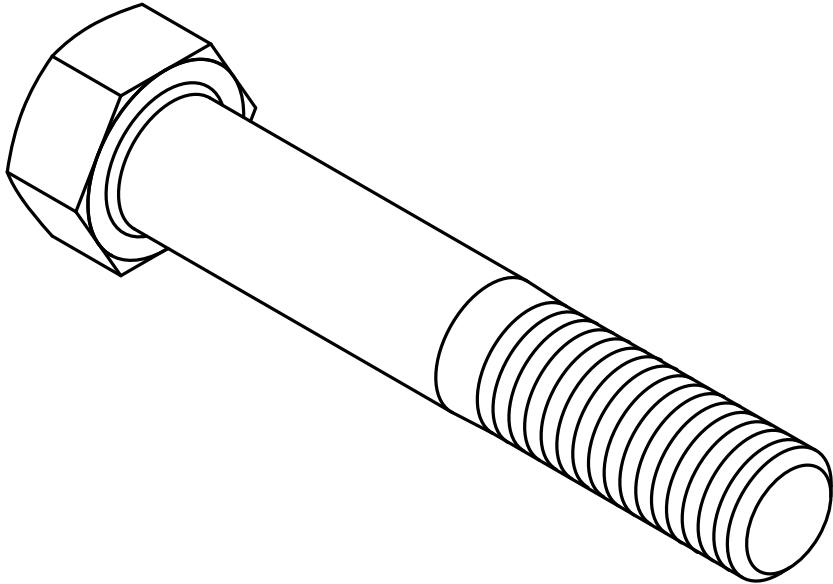

1/2" x 3" Hex Bolt

4


Qty: 16x

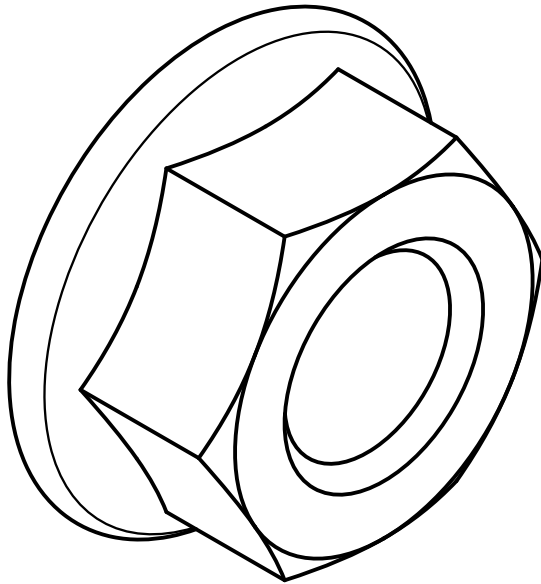

1/2" Flange Nut

5


Qty: 4x

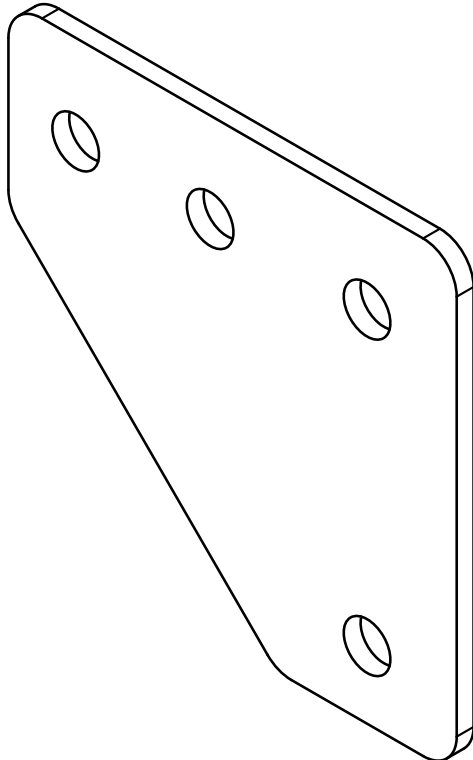

Bench Top Plate

6


Qty: 1x

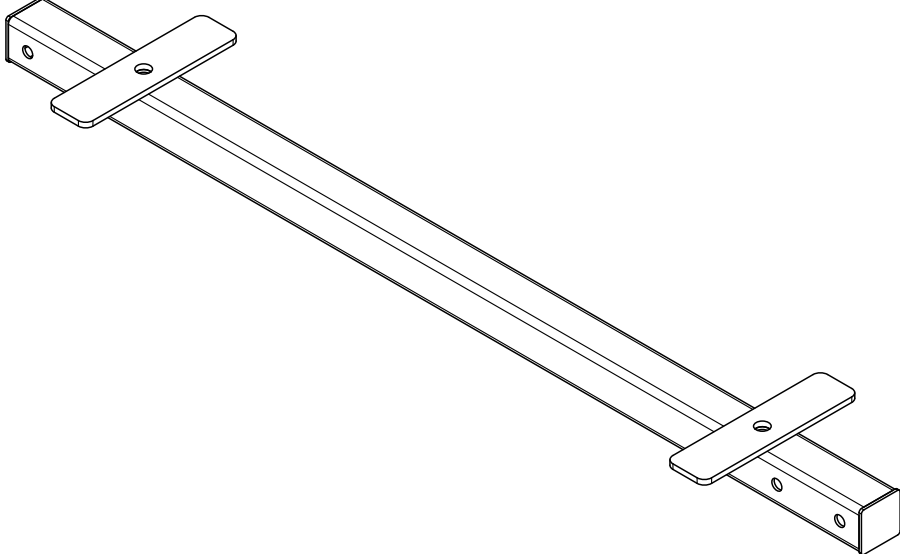

Bench Top

7


Qty: 1x

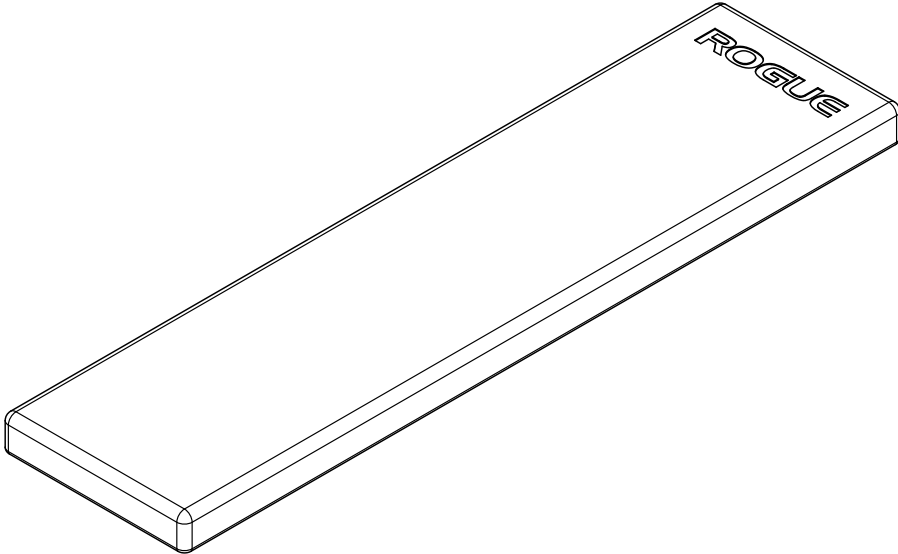

Bench Pad

8


Qty: 2x

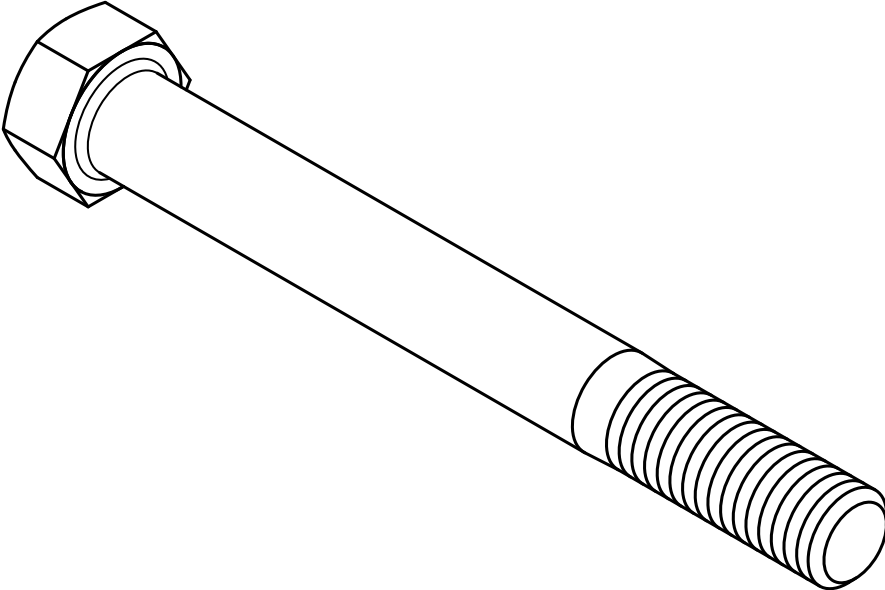

3/8" x 3.25" Hex Bolt

9


Qty: 2x

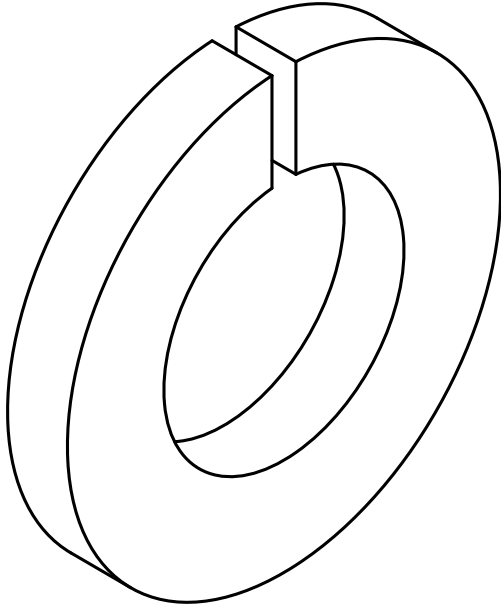

3/8" Split Lock Washer

10


Qty: 2x

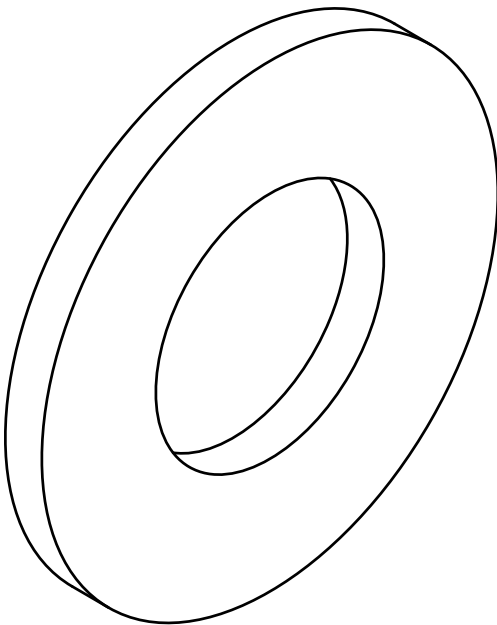

3/8" Flat Washer

11



Qty: 2x

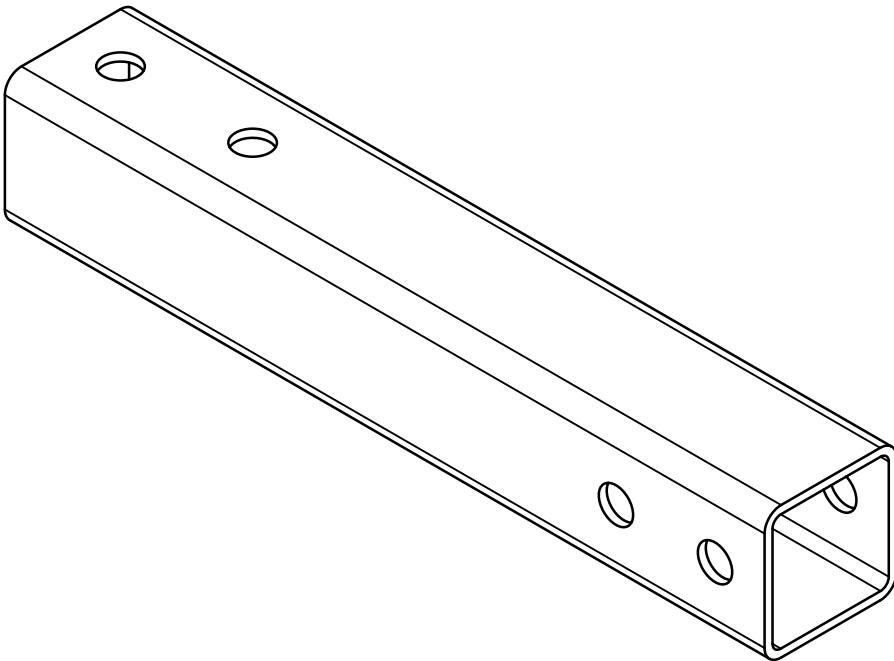

Bench Leg


STEP 1

- Place Bench Leg [11] on top of Bench Foot [1].
- Attach Bench Foot Plate [2] using 1/2" x 3" Hex Bolts [3] and 1/2" Flange Nuts [4].
- Repeat both sides.
- Hand Tight Only.
- Attach Bench Top [6] to Bench Legs [11] using 1/2" x 3" Hex Bolts [3], Bench Top Plates [5], and 1/2" Flange Nuts [4].

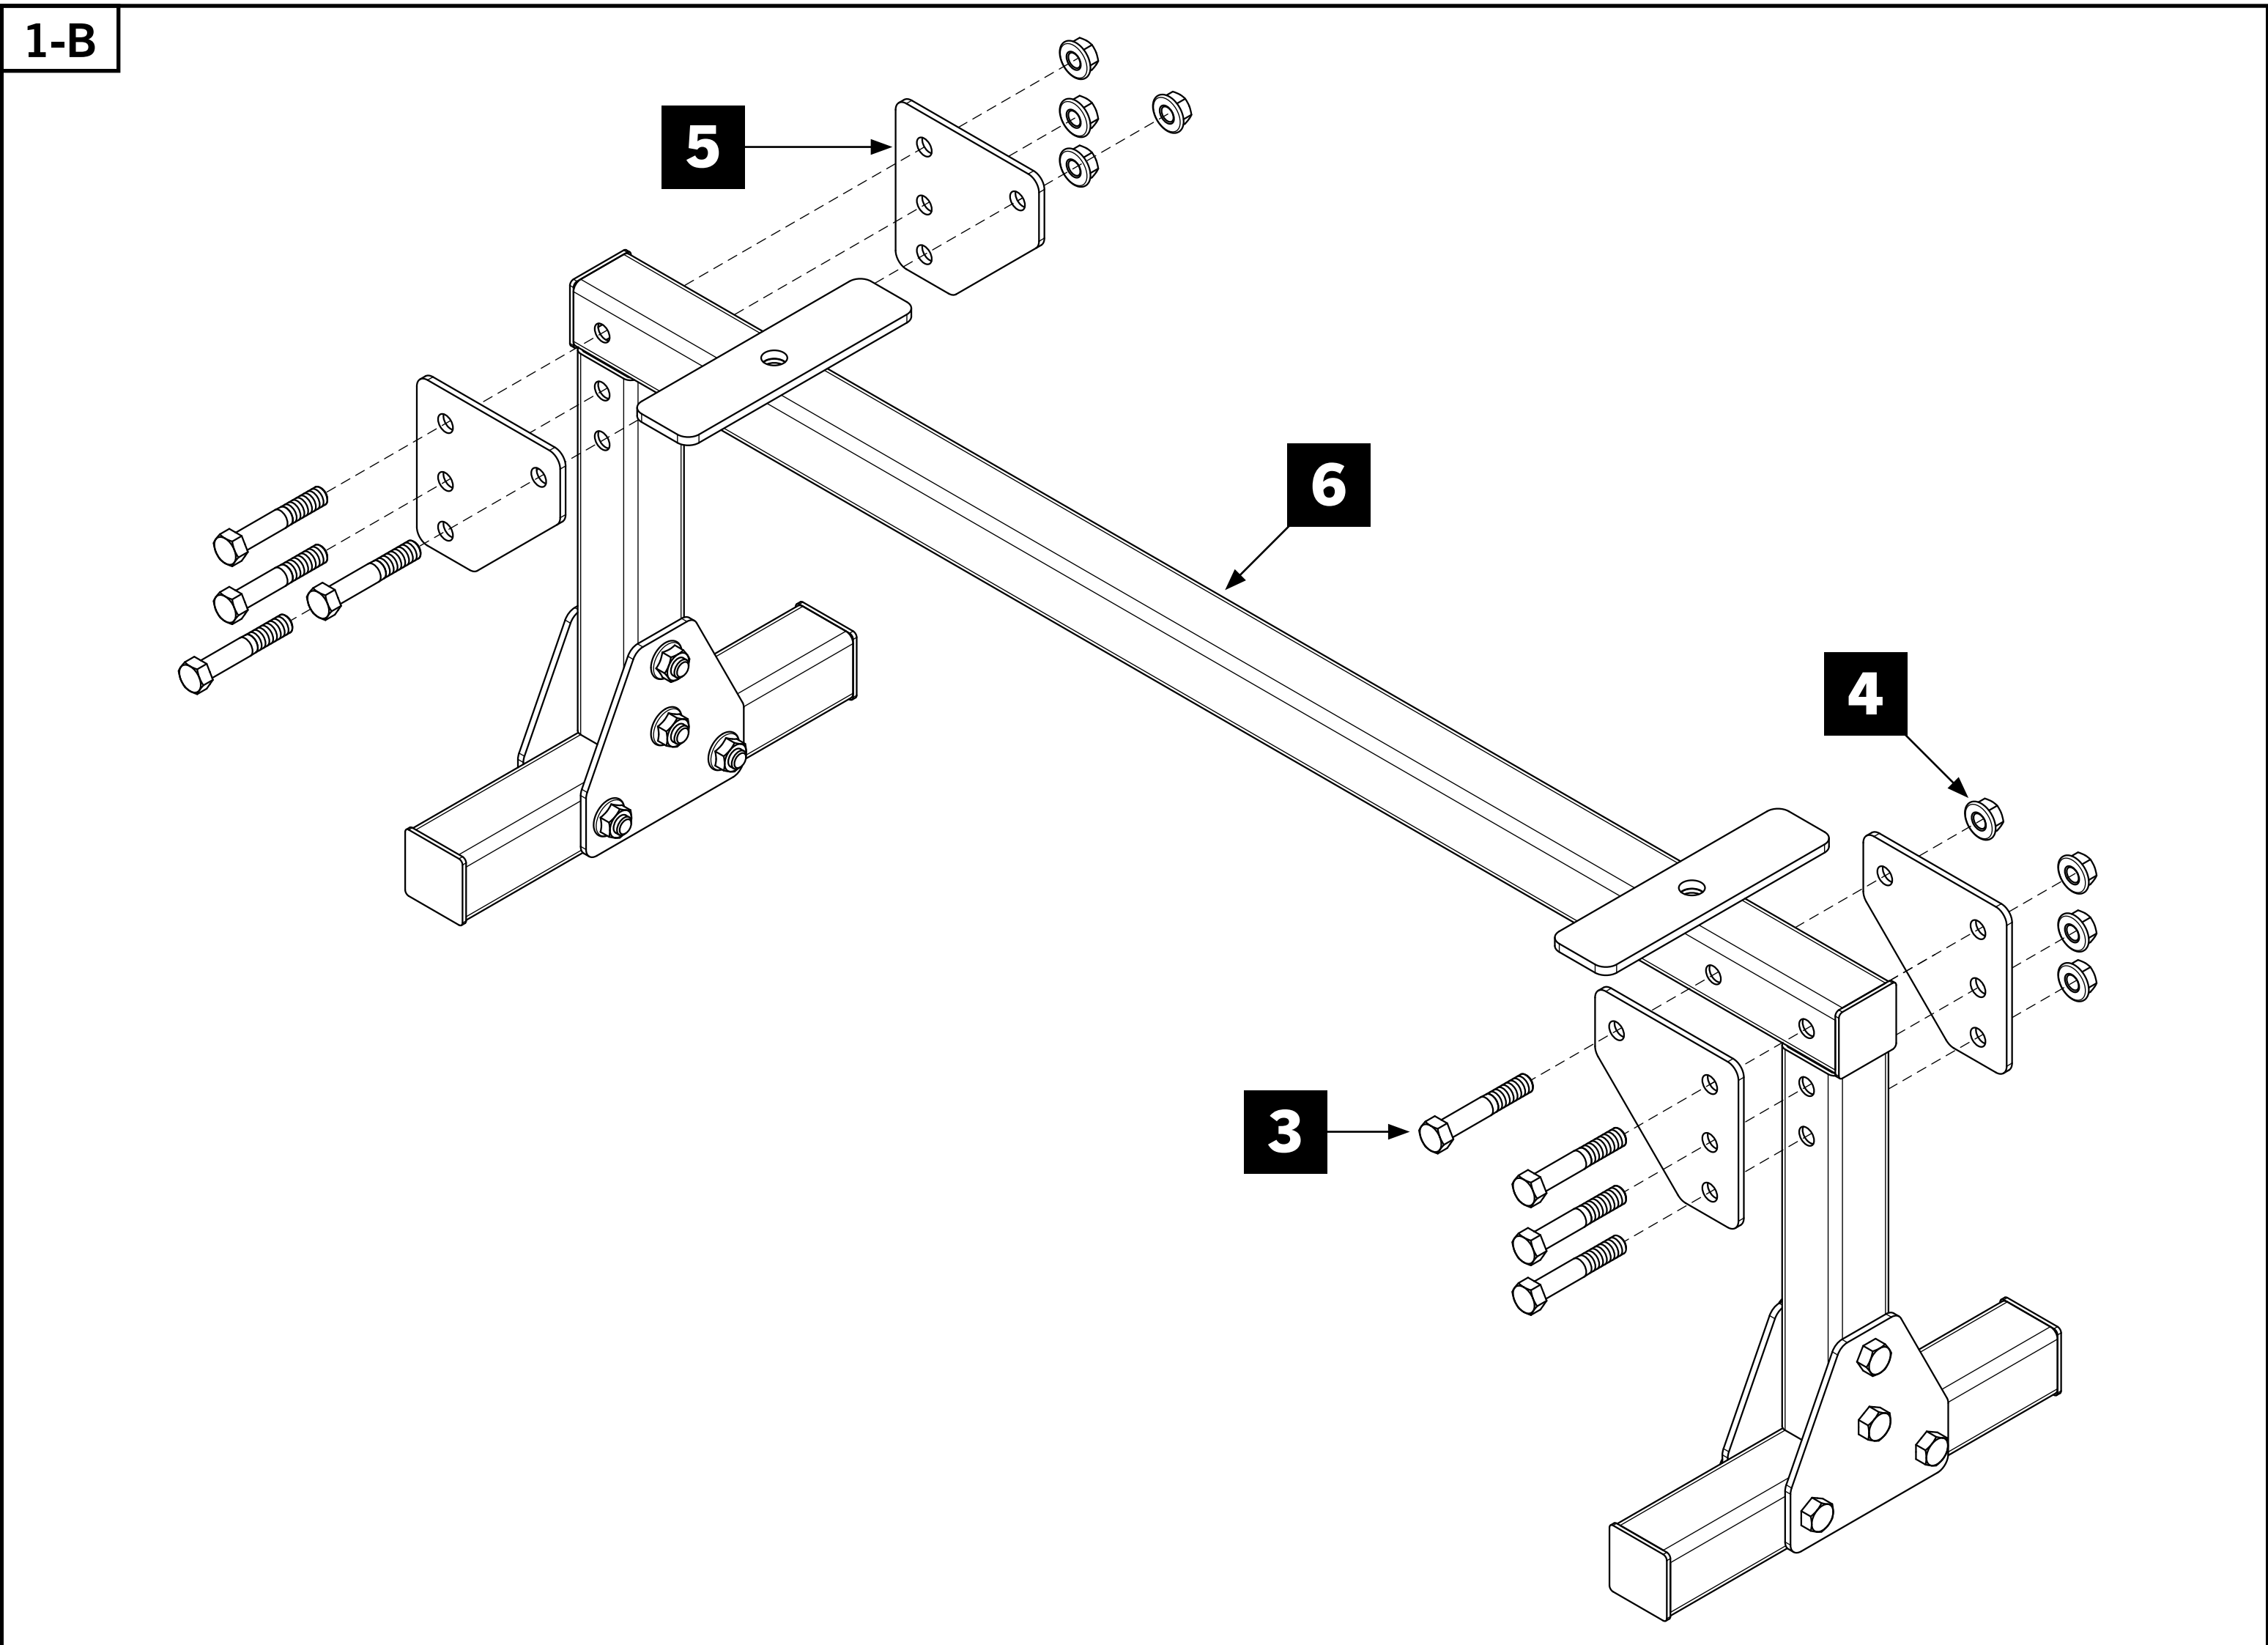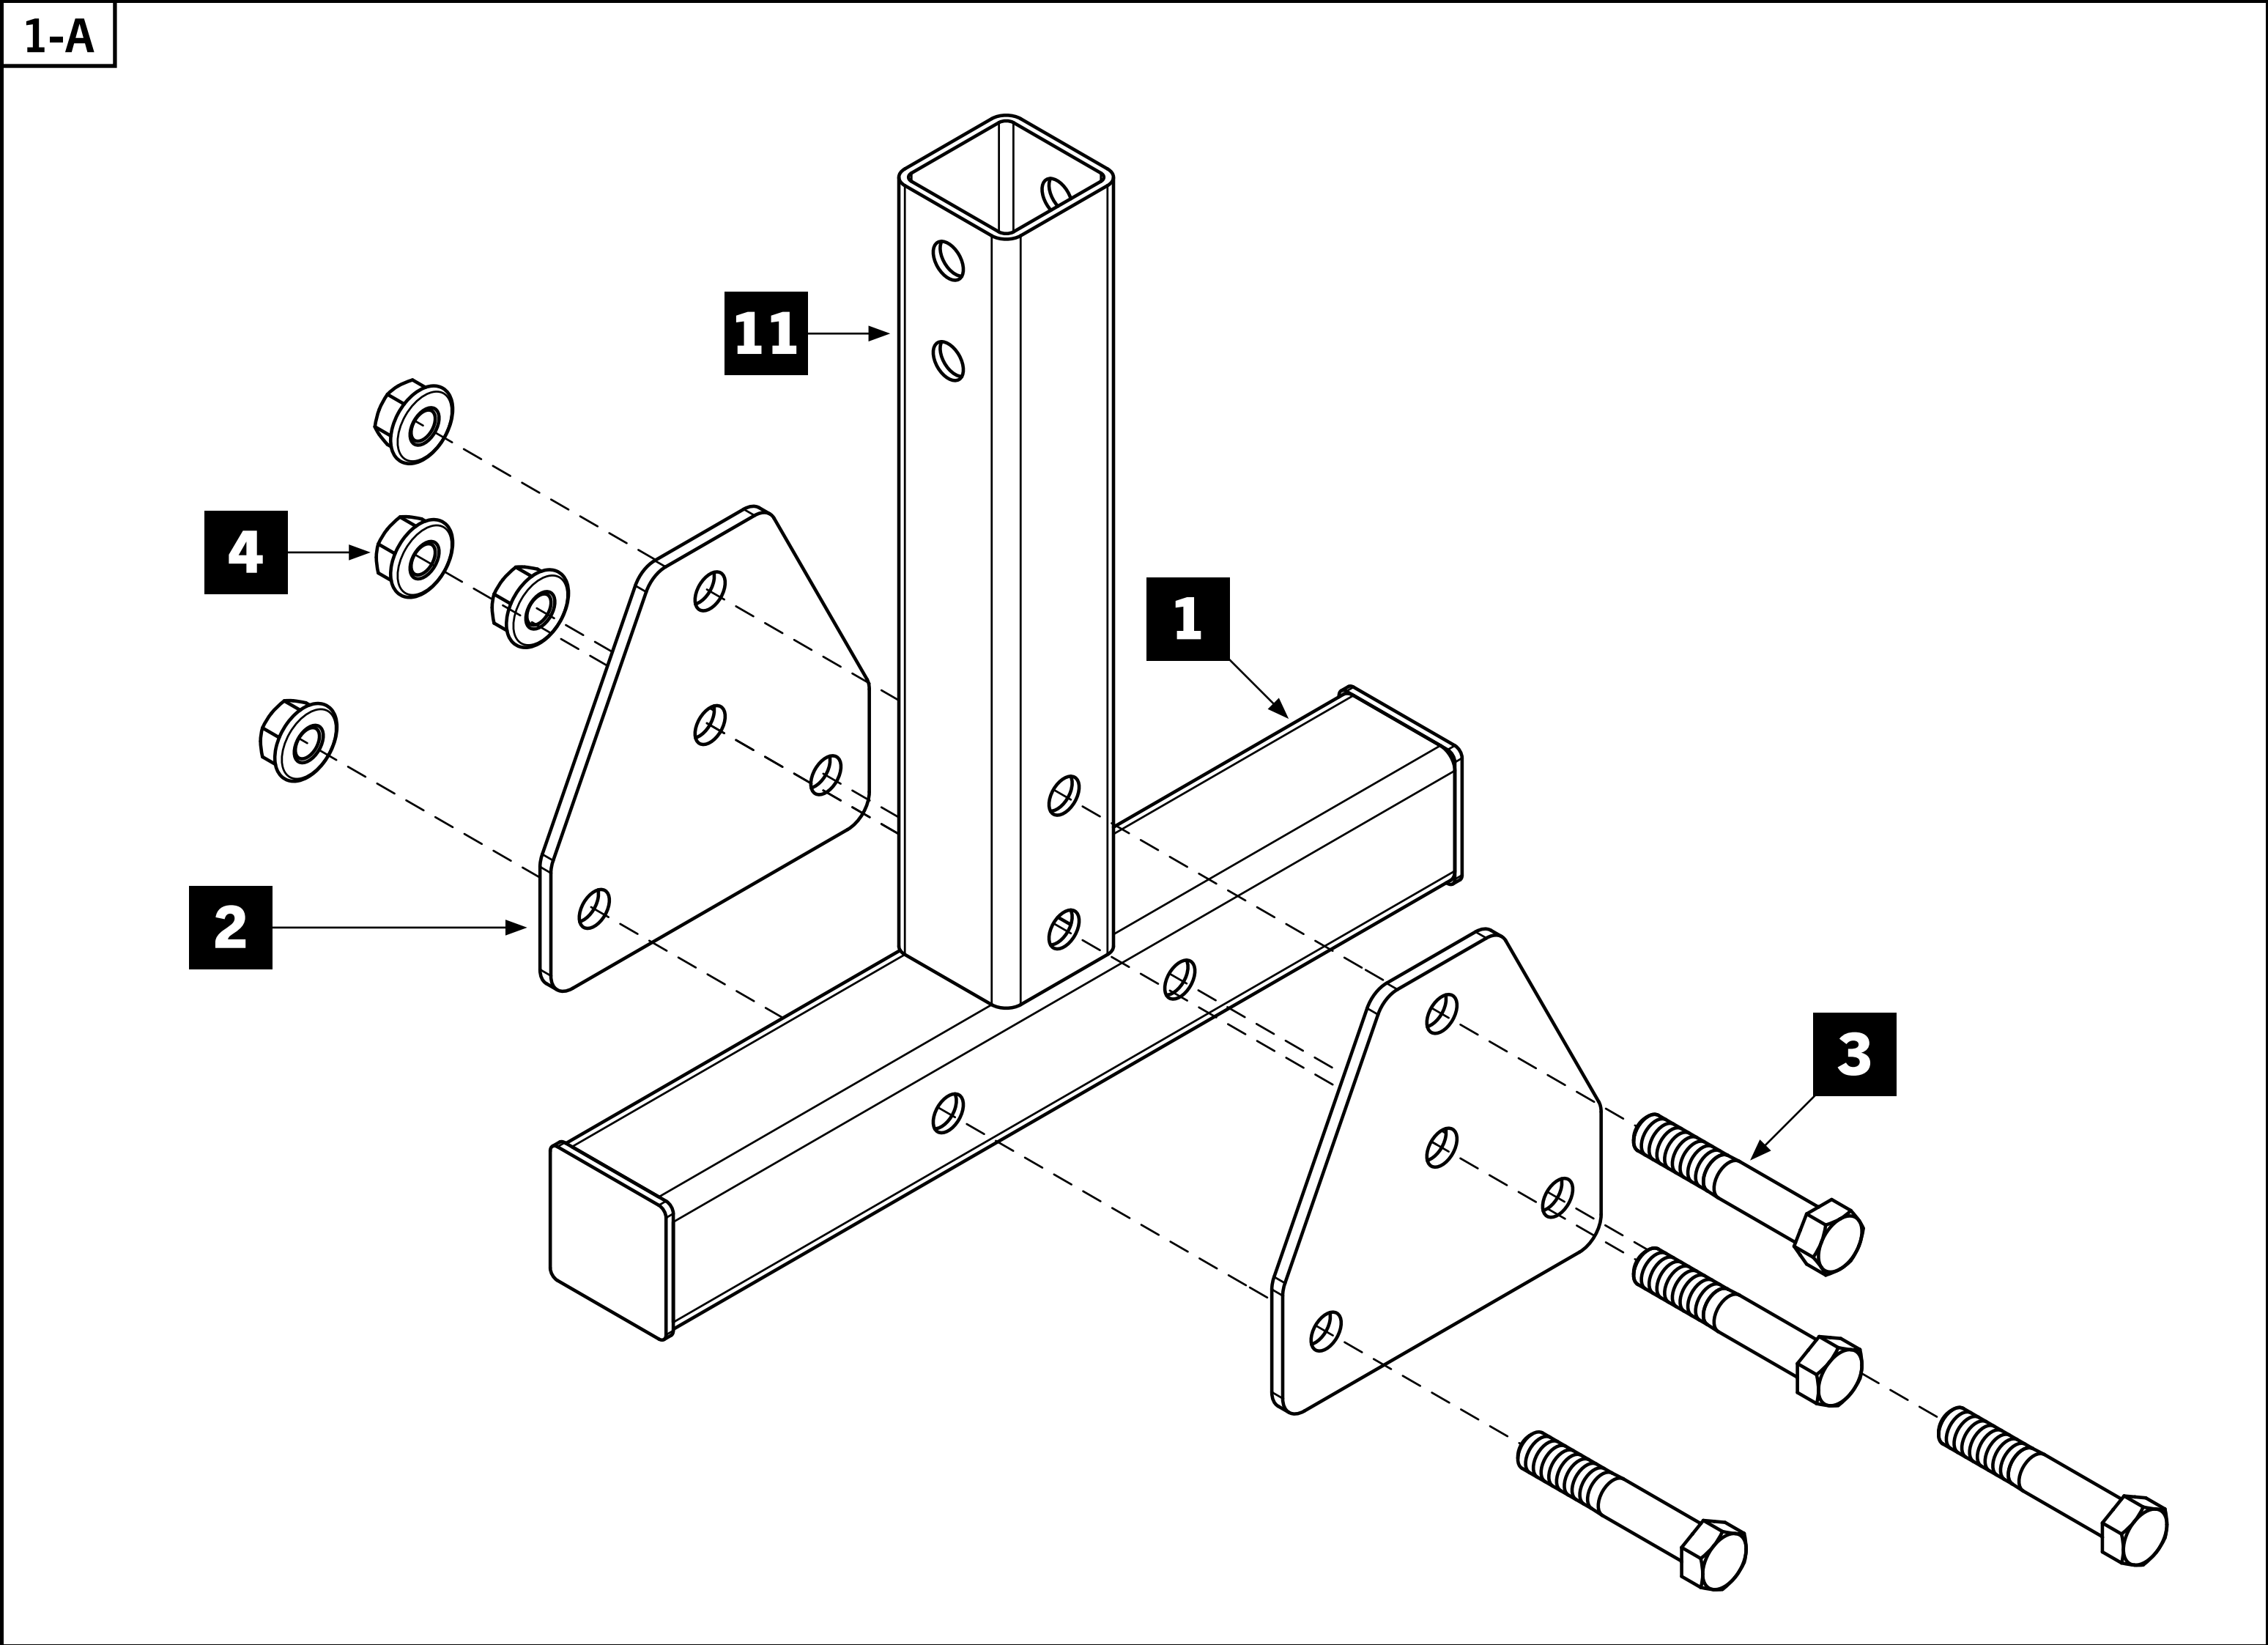

STEP 2

- Attach Bench Pad [7] to Bench Top [6] using 3/8" x 3.25" Hex Bolts [8], and 3/8" Split Lock Washers [9], and 3/8" Flat Washers [10].
- **ENSURE THE BENCH IS LEVEL ON THE FLOOR, THEN FULLY TIGHTEN ALL HARDWARE.**
- Make sure hardware is tightened prior to each use.

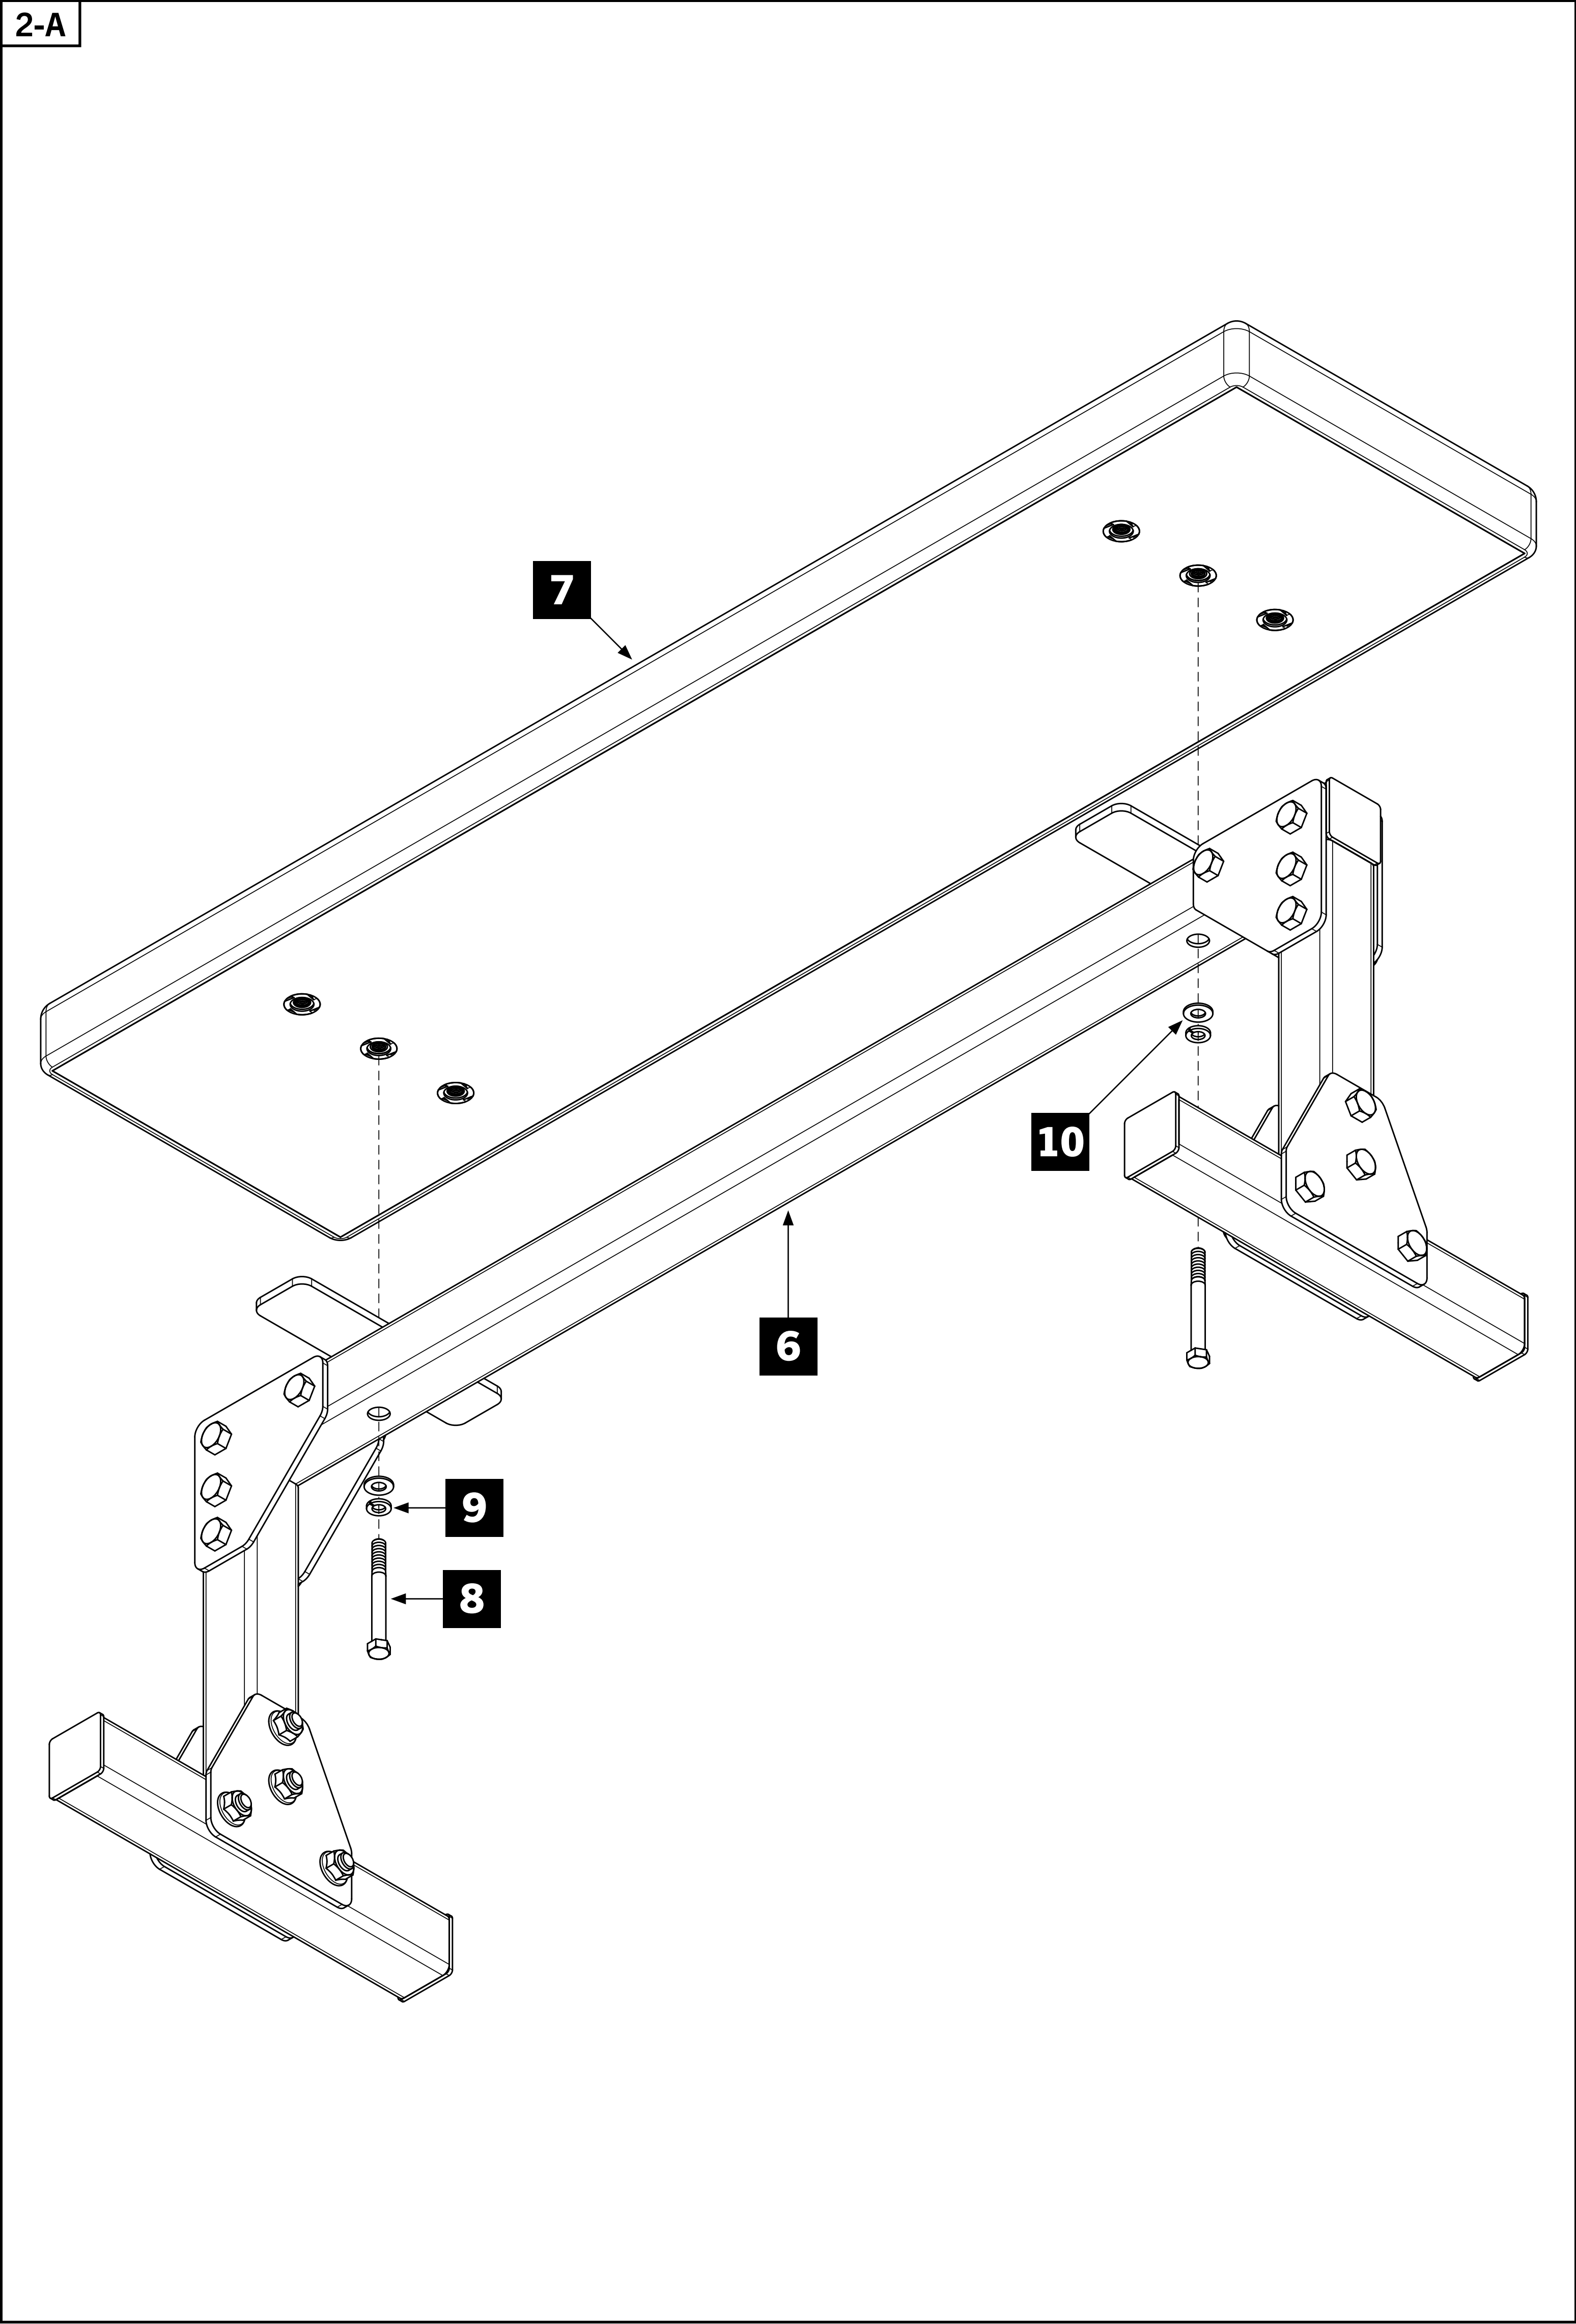

ROGUE



**SCAN FOR
INSTRUCTIONS**



**IRON GAME
PROGRAMMING**