
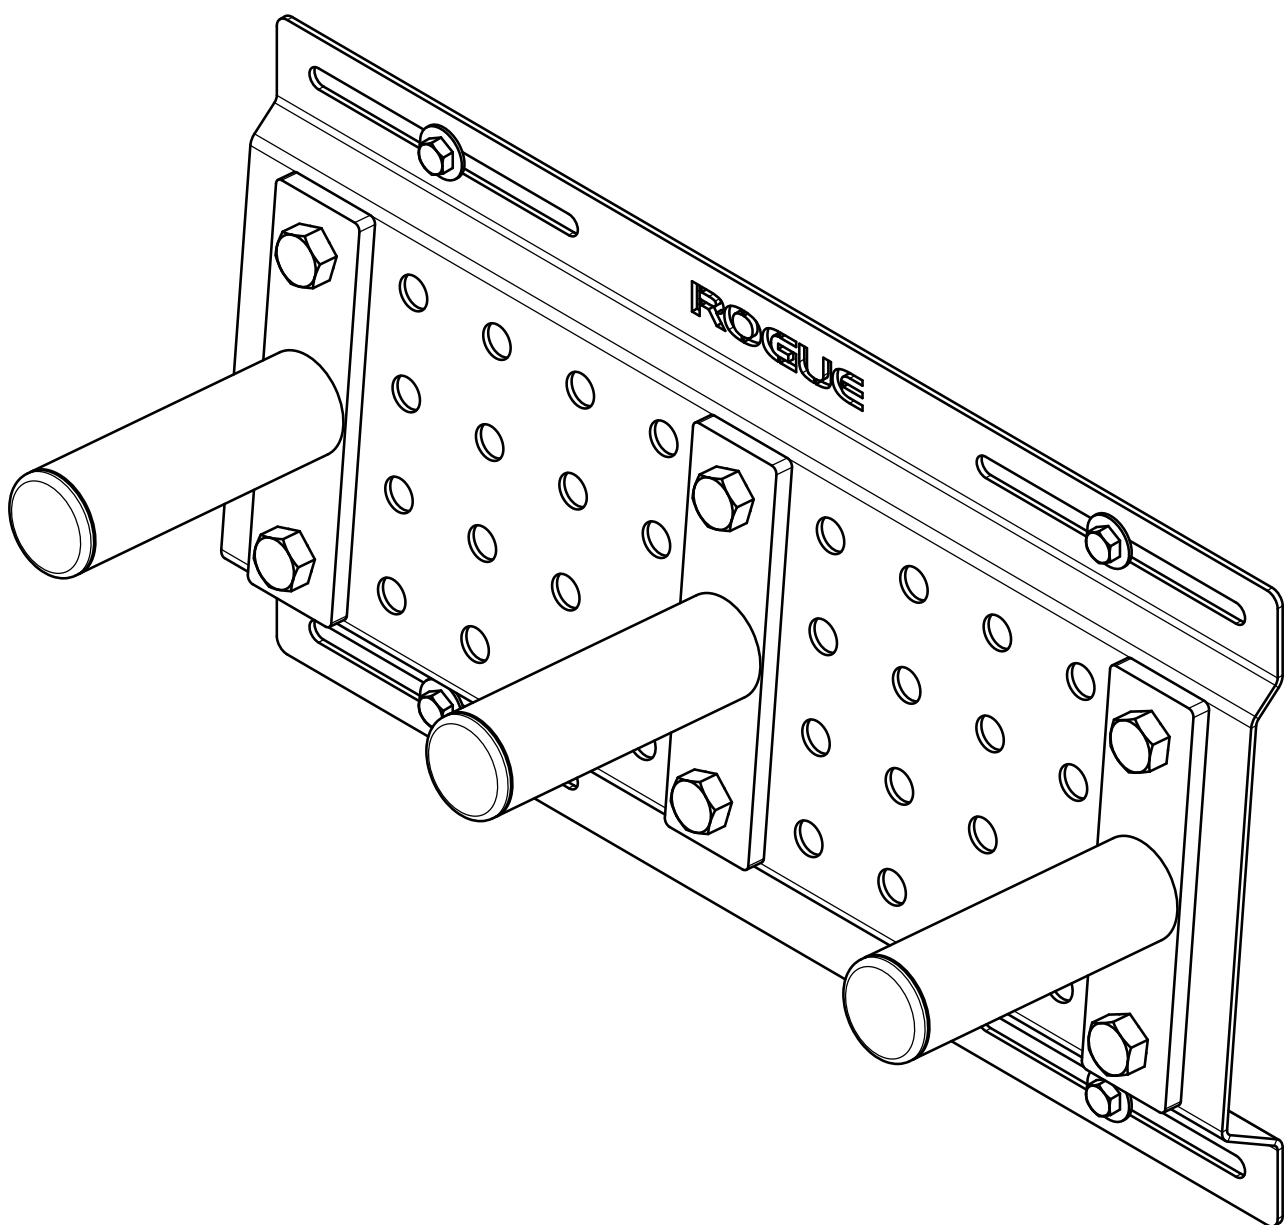


ROGUE[®]

24" WALL STORAGE STRINGER

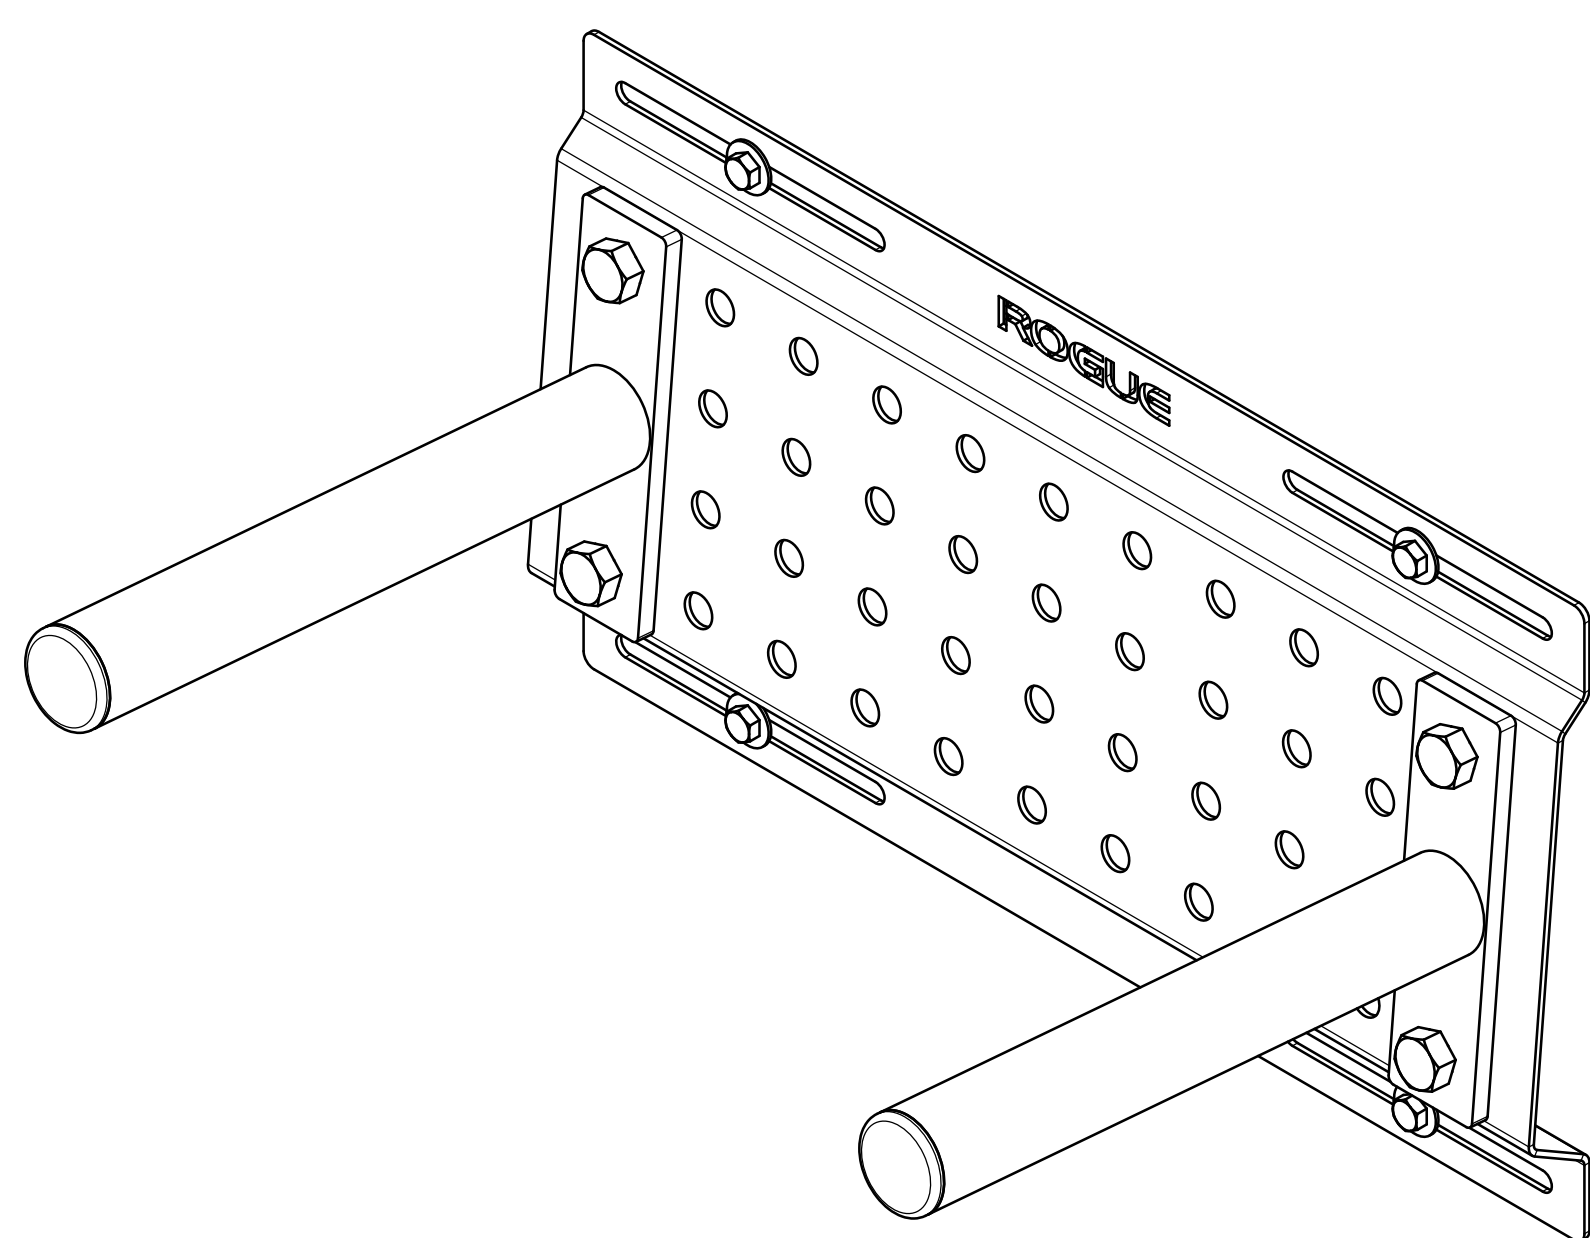

IMPORTANT SAFETY INFORMATION

DISCLAIMER:

Resistance training, gymnastics training, and activities at height are potentially dangerous and may lead to severe injury or even death. Use common sense when training, obtain instruction in the proper execution of movements, and understand your limitations. This equipment must only be used by competent and responsible persons. Obtaining instruction in appropriate techniques and methods of use is your own responsibility. You assume all risks and responsibilities for all damage, injury or death which may occur during or following incorrect use of this equipment in any matter whatsoever. Rogue Fitness bears no liability beyond the replacement value of the equipment in question.

WARNING:


MISUSE OF THIS PRODUCT CAN RESULT IN SEVERE INJURY. Both Rogue Fitness and buyer disclaim any express or implied warranty, including, without limitation, warranties or merchantability and/or fitness for a particular purpose with respect to the equipment. Buyer assumes all liability to use of equipment.

INCLUDED PARTS

Note: Images not shown at scale

1

Qty: 1x

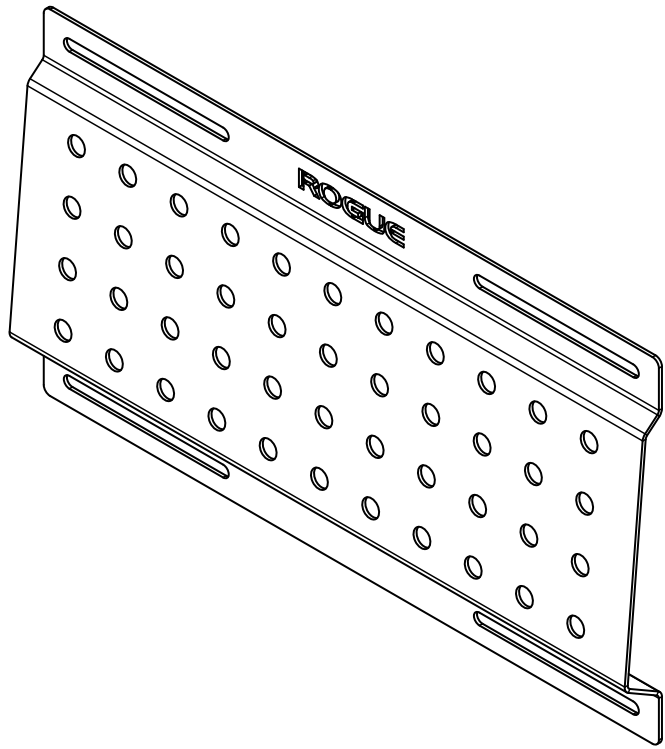


Angled Wall Stringer

2

Qty: 2x

*

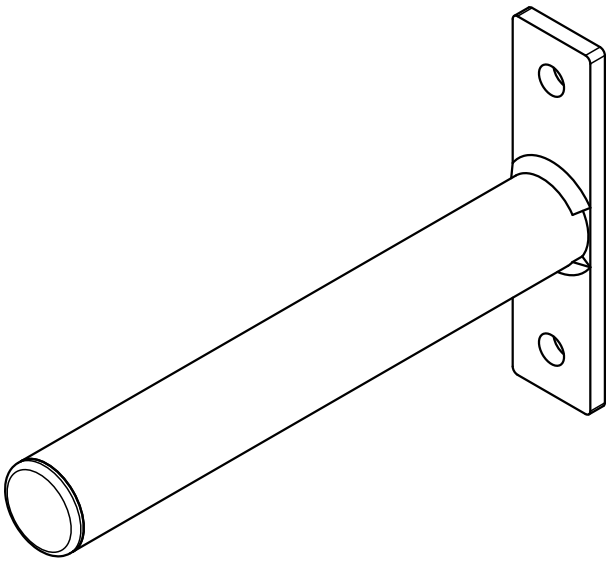


Long Plate Storage Post

3

Qty: 3x


*

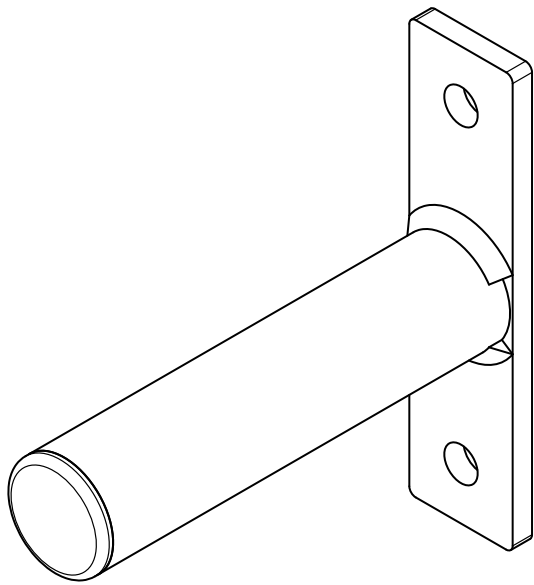

Short Plate Storage Post

4

Qty: 6x

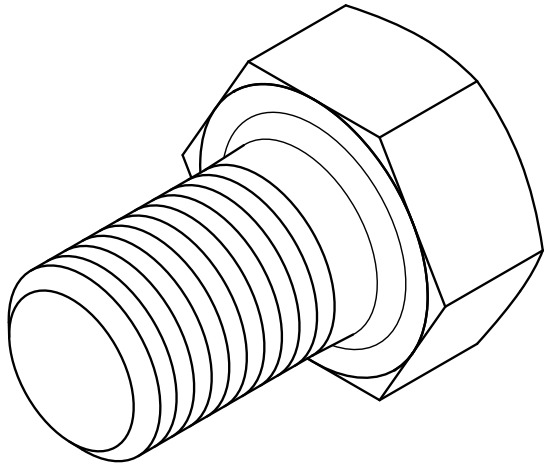

5/8" x 1" Hex Bolt

5


Qty: 6x



5/8" Thin Nyloc Nut

6


Qty: 4x

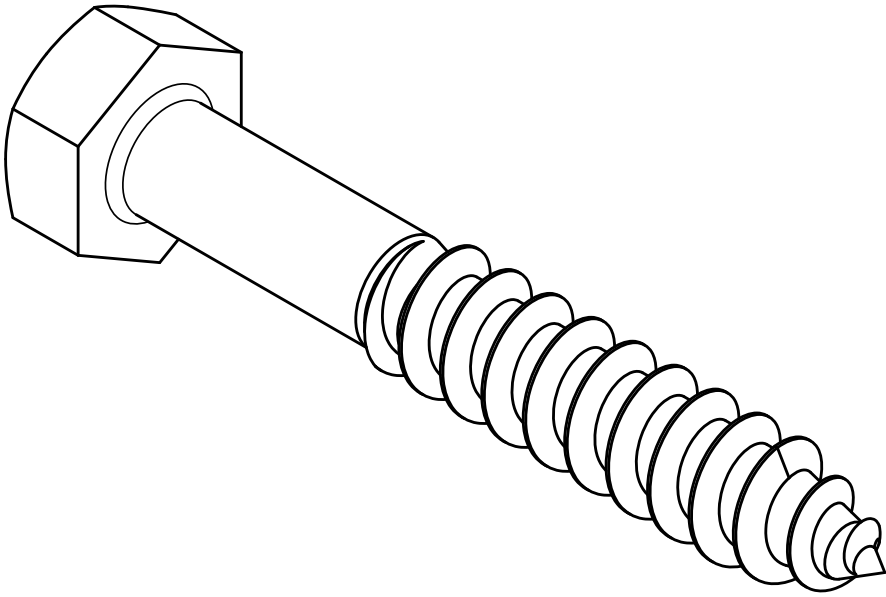

3/8" Lag Screw

7

Qty: 4x

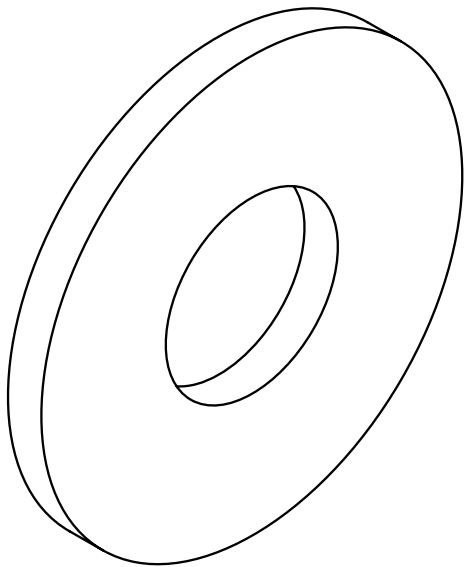


3/8" Flat Washer

* Plate storage post quantities will depend on the version purchased.
* If purchased the long plate storage post version there will be left over 5/8" hardware.


STEP 1

- Depending on which version was purchased attach the Plate Storage Posts [2,3] to the Angled Wall Stringer [1] in the preferred locations as shown using 5/8” x 1” Hex Bolts [4], and 5/8” Thin Nyloc Nuts [5].
- Fully tighten 5/8” Hardware.

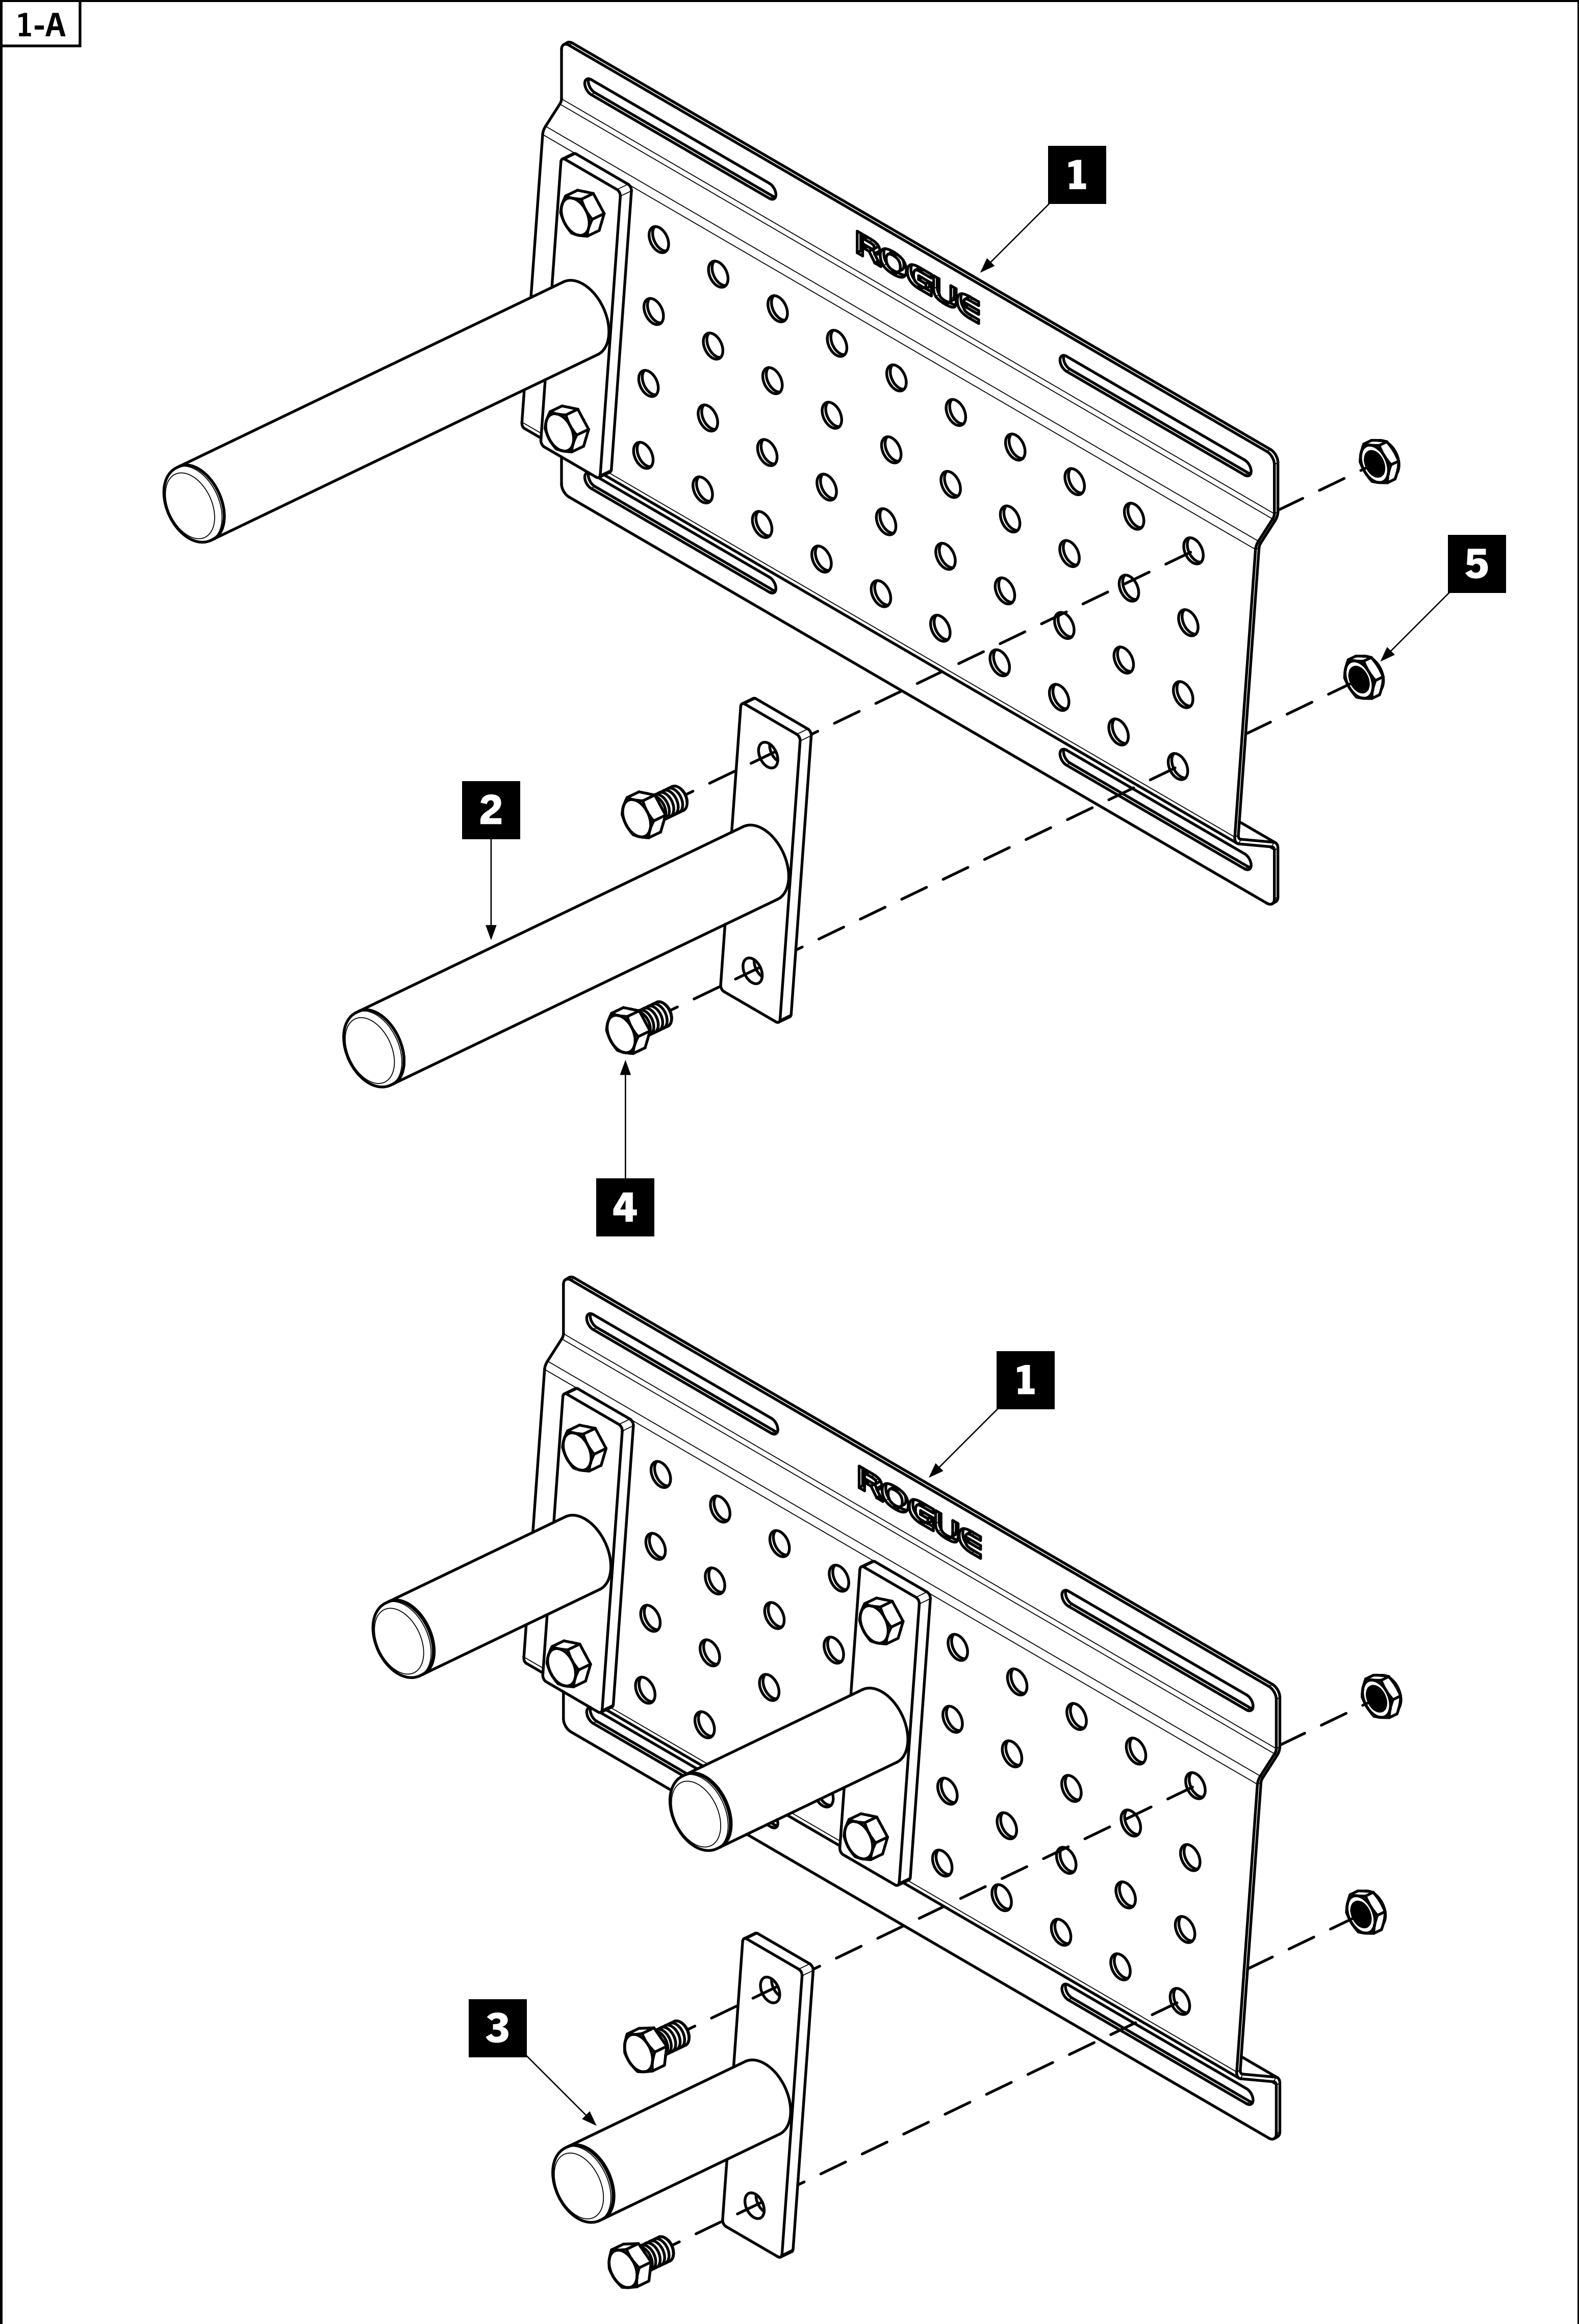

STEP 1

- Secure the assembled Stringer to the wall with the Plate Storage Posts angled up.
- Stringer must be level and secured to 2 studs using Wood Lag Screws [6], and 3/8” Flat Washers [7].
- Wood Lag Screws [6] provided, use 15/64” Dia. pilot holes.
- IF ATTEMPTING TO SECURE THE STRINGERS TO WALL CONSTRUCTION OTHER THAN WOOD THE BUYER IS RESPONSIBLE FOR USING THE CORRECT HARDWARE.
- WARNING: IF YOU ARE NOT CONFIDENT IN YOUR MECHANICAL SKILLS, PLEASE SEEK THE HELP OF A PROFESSIONAL TO PERFORM THE INSTALLATION. IT IS THE BUYERS RESPONSIBILITY TO INSTALL THE STRINGER IN A LOCATION AND WITH HARDWARE CAPABLE OF SUPPORTING THE AGGREGATE WEIGHT OF THE STRINGER AND ALL GEAR MOUNTED OR STORED ON IT, AND ANY PERSON USING IT.
- Wood studs shown as reference.

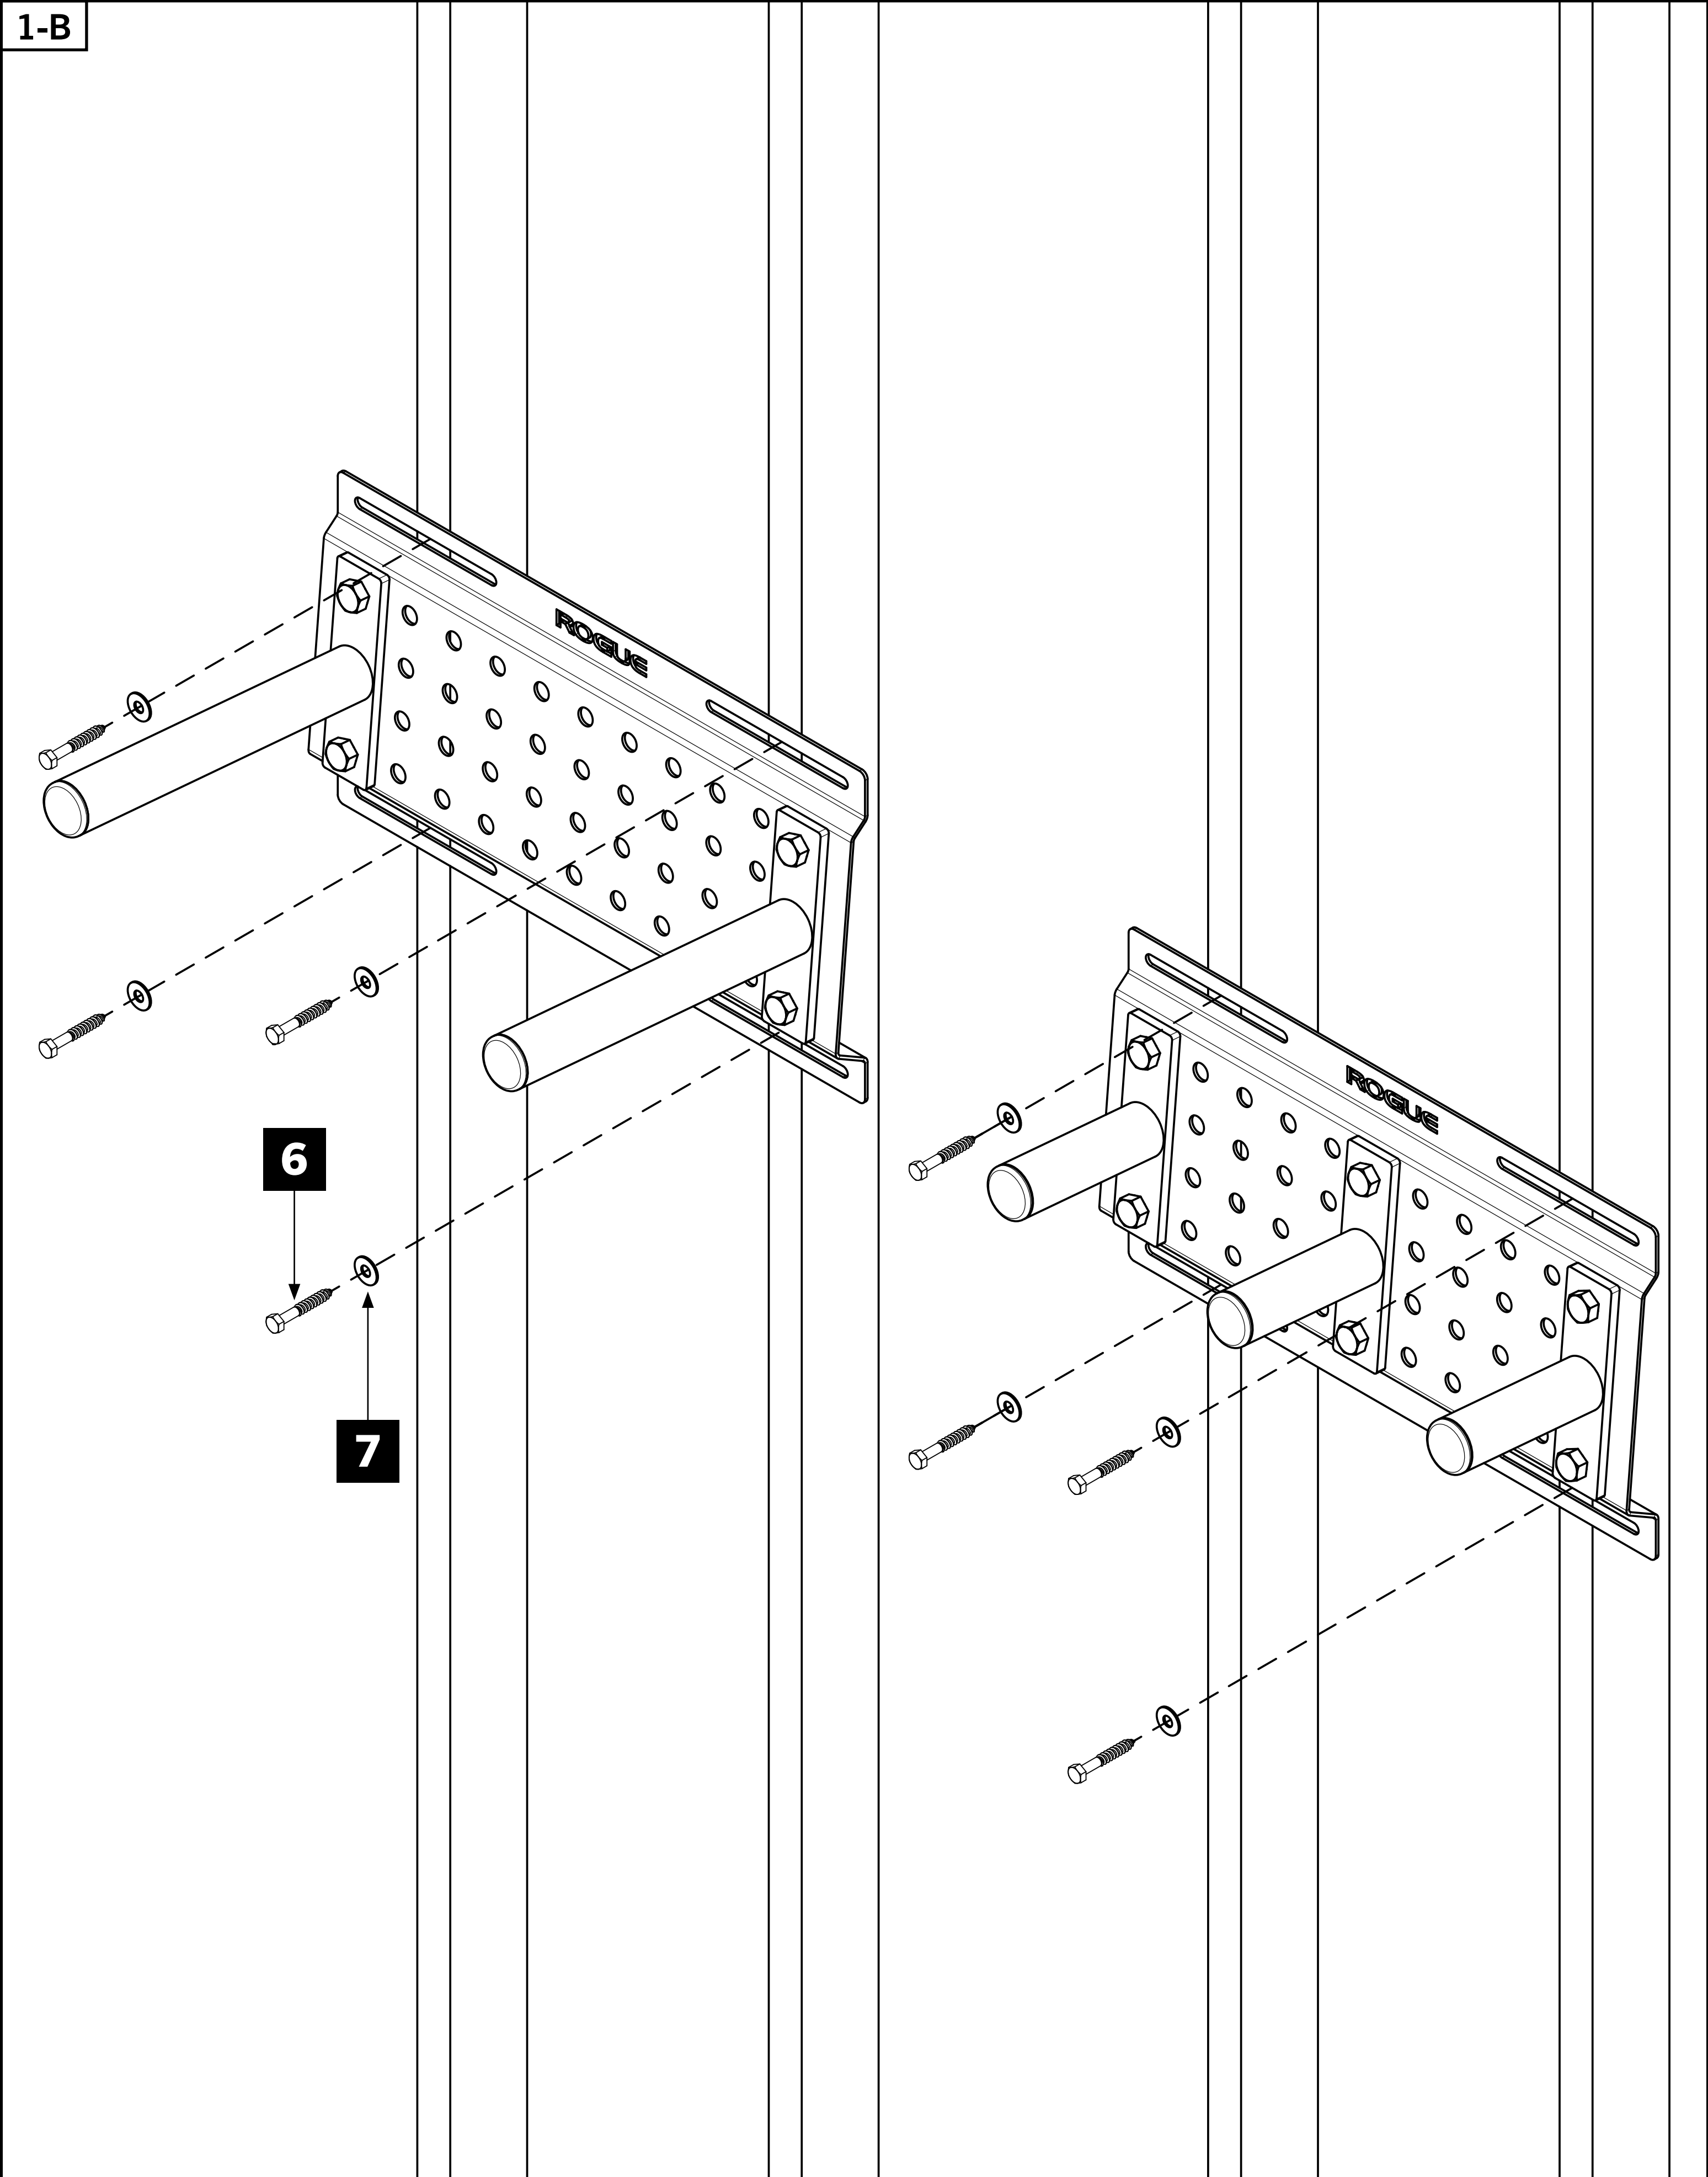

ROGUE



**SCAN FOR
INSTRUCTIONS**



**IRON GAME
PROGRAMMING**