
INFINITY / MONSTER LITE
WHEEL BRACKET SET

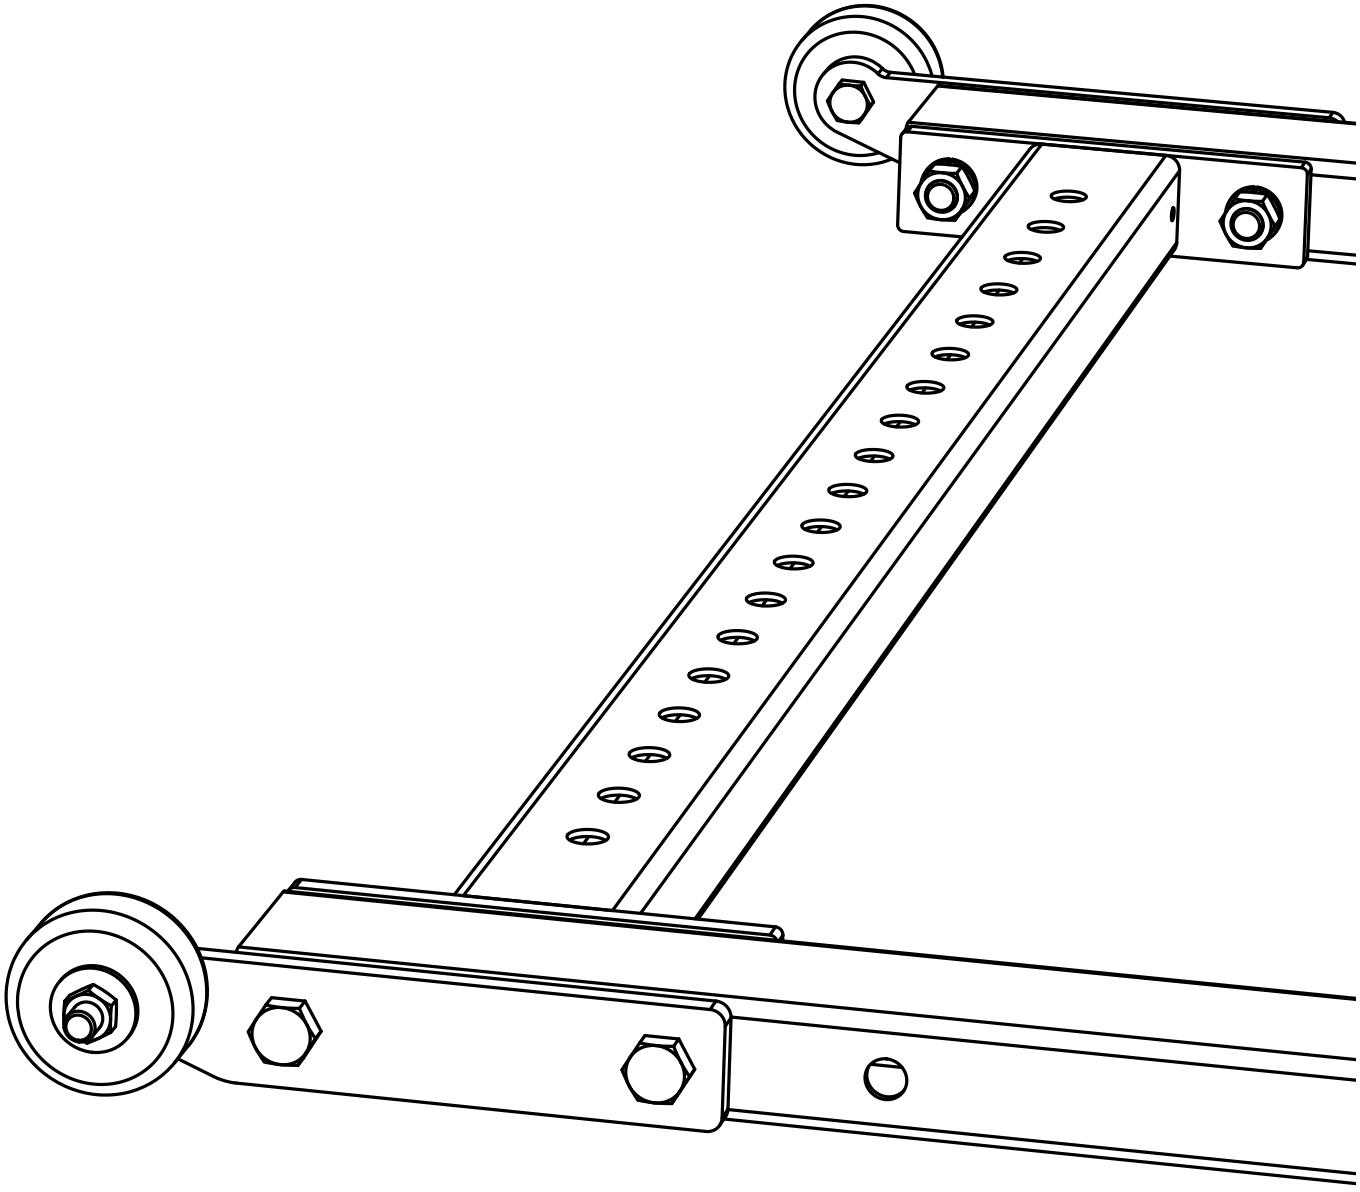

INSTRUCTIONS AND ASSEMBLY

ROGUE®

Rogue Fitness • 545 E 5th Ave. Columbus, Ohio 43201 • Customer Service: 614-358-6190 • Team@RogueFitness.com


GENERAL GUIDELINES

• Please read these customer instructions thoroughly prior to assembling.

TOOLS REQUIRED

Note: Images not shown at scale

Qty: **2x**



15/16” Socket / Wrench

IMPORTANT SAFETY INFORMATION

DISCLAIMER:

Resistance training, gymnastics training, and activities at height are potentially dangerous and may lead to severe injury or even death. Use common sense when training, obtain instruction in the proper execution of movements, and understand your limitations. This equipment must only be used by competent and responsible persons. Obtaining instruction in appropriate techniques and methods of use is your own responsibility. You assume all risks and responsibilities for all damage, injury or death which may occur during or following incorrect use of this equipment in any matter whatsoever. Rogue Fitness bears no liability beyond the replacement value of the equipment in question.

WARNING:


MISUSE OF THIS CAN RESULT IN SEVERE INJURY.

Both Rogue Fitness and buyer disclaim any express or implied warranty, including, without limitation, warranties or merchantability and/or fitness for a particular purpose with respect to the equipment. Buyer assumes all liability to use of equipment.

INCLUDED PARTS


Note: Images not shown at scale

1 Qty: **1x**




Wheel Bracket LH

2 Qty: **1x**



Wheel Bracket RH

3 Qty: **2x** *



Band Peg

* Only included if Band Peg Pair was selected at checkout.

STEP 1

Tools Required:
• 15/16” Socket / Wrench


• Unscrew existing 5/8” bolt assembly attaching crossmember to base tubes and discard or set aside flat washers.

• Attach Wheel Bracket LH **1** and RH **2** to base assembly using existing hardware as shown below.


Note:
• Pay attention to LH and RH Wheel Bracket placement as shown in Wheel Bracket Detail (right). Wheels should be oriented outward and slightly raised from ground.

• Flat washers on the outside of assembly must be removed for Hex Bolt to properly engage Hex Nut threads. Do not remove Split Lock Washers on inside of assembly.

WHEEL BRACKET DETAIL

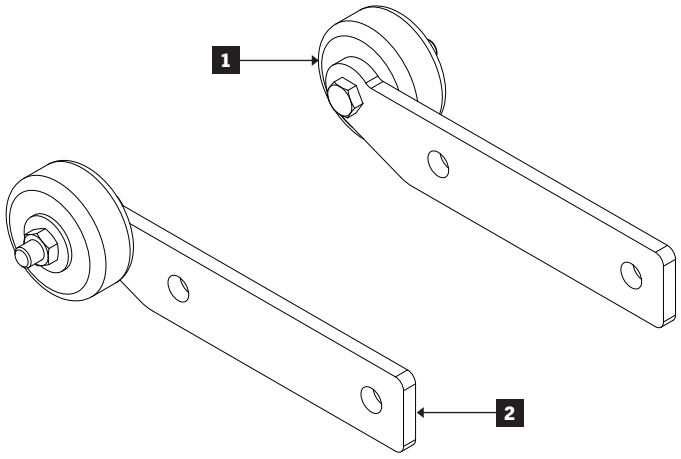

1-A

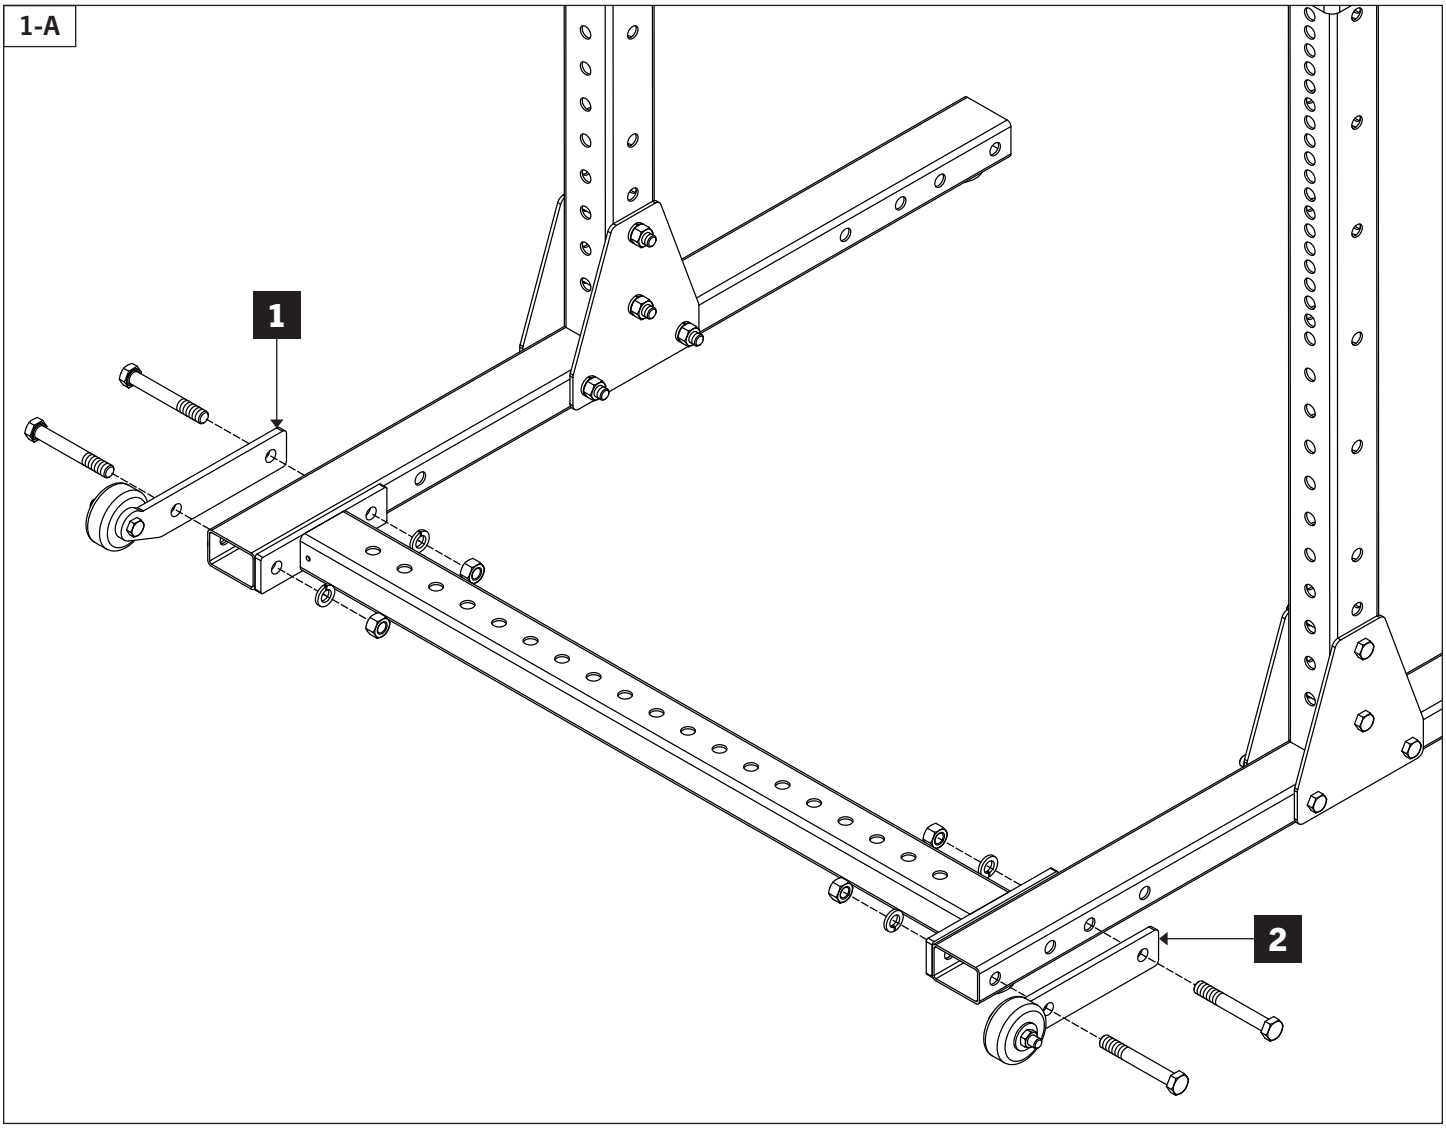


STEP 2 (OPTIONAL)

Tools Required:
• None

• If Band Pegs **3** were purchased, insert them into front base tube holes when moving squat stand.

Warning:
• Band Pegs present a tripping hazard when installed towards the inside of rack and should be removed prior to use.

• Banded work should not be performed on a stand that isn't securely fastened to the floor.

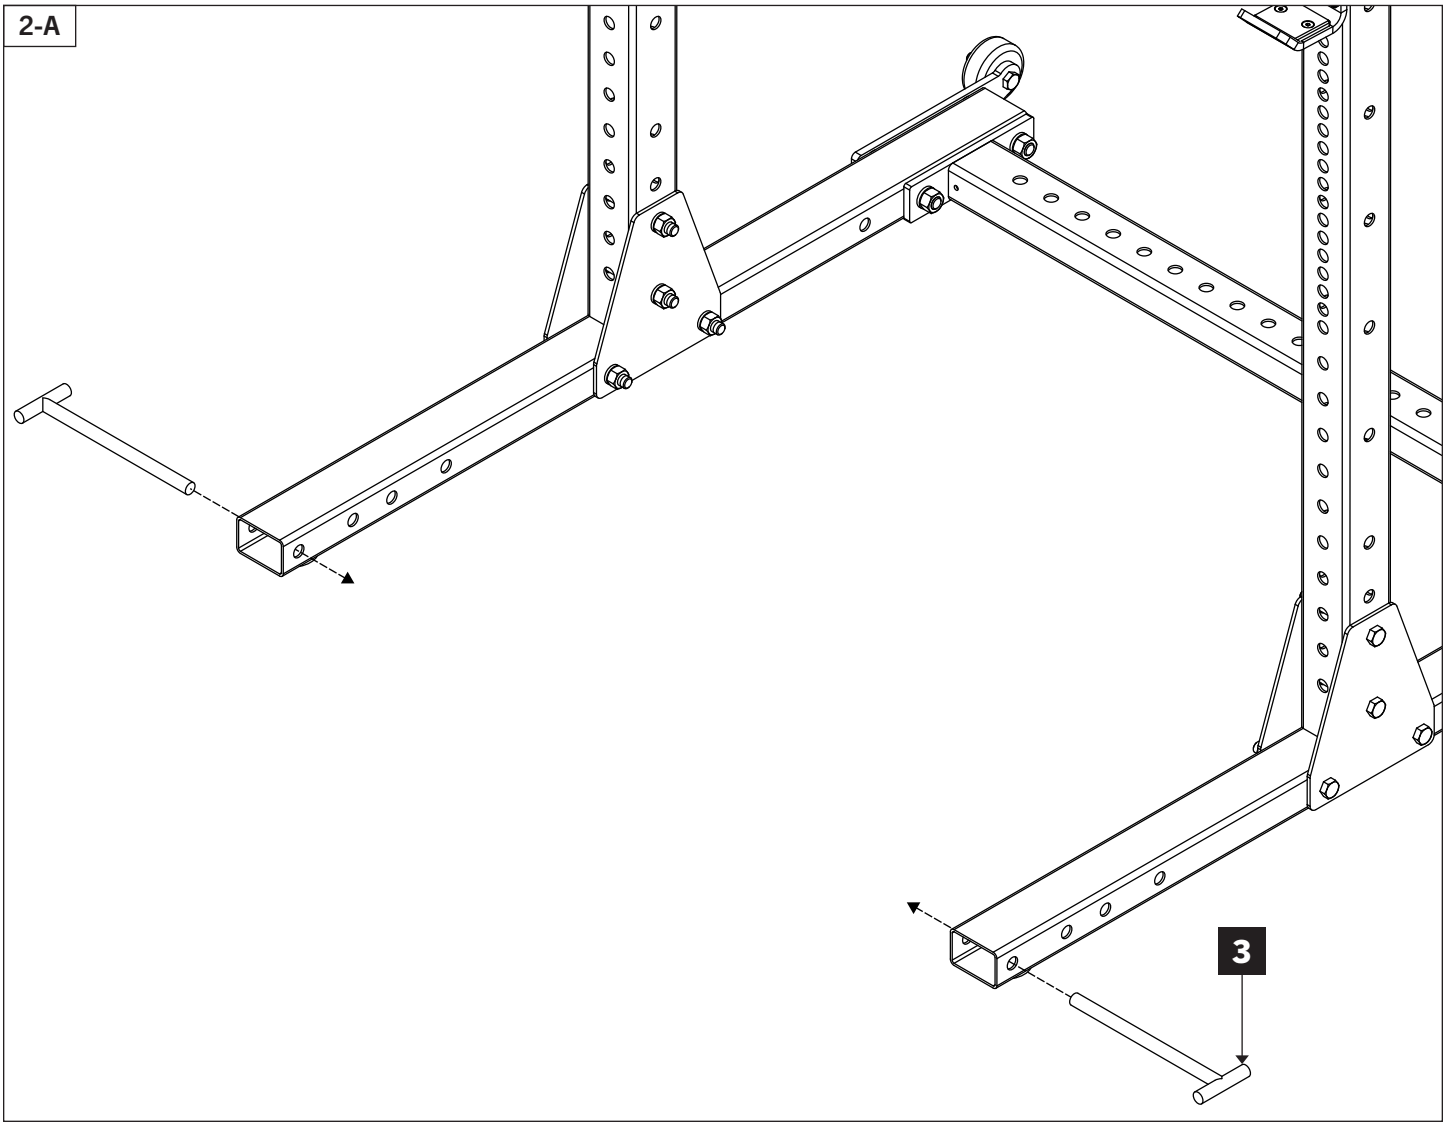

STEP 3

Tools Required:
• None, assembly is complete.

• Lift the front of squat stand by grabbing Band Pegs or base tubes to engage wheels. Roll stand to desired location.

Warning:
• Remove all bars, weights, and attachments before attempting to move squat stand.

